




Elektro-Automatik

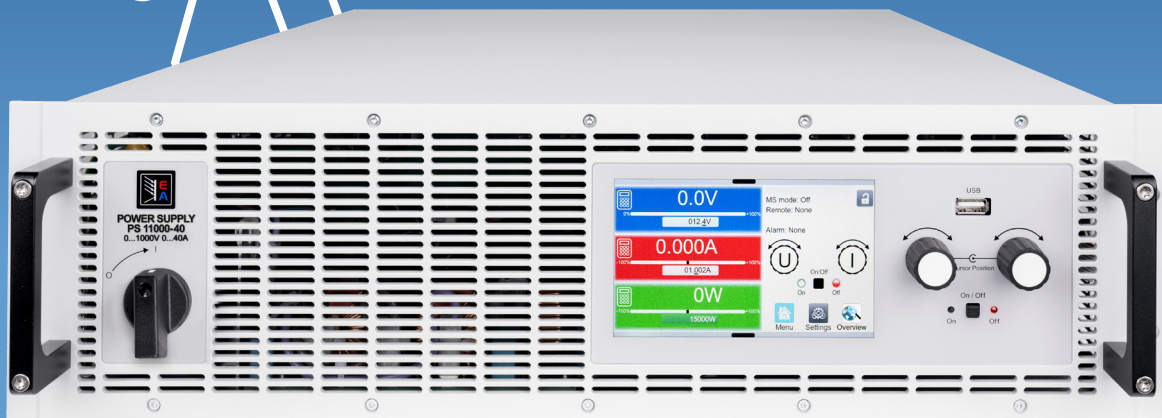

DATASHEET

EA-PS 10000 3U

Programmable DC power supplies

EA-PS 10000 3U

5 KW - 10 KW - 15 KW

Programmable DC power supplies



Features

- Wide range input: 208 V - 480 V, $\pm 10\%$, 3ph AC
- Active Power Factor Correction, typical 0.99
- Very high efficiency of up to 96%
- High performance of up to 15 kW per unit
- Voltages from 0 - 60 V up to 0 - 2000 V
- Currents from 0 - 20 A up to 0 - 510 A
- Flexible power regulated DC output stage (autoranging)
- Regulation modes CV, CC, CP, CR with fast crossover
- Digital regulation, high resolution with 16bit ADCs and DACs, selection of voltage regulation speed
- Color 5" TFT display with touch control and intuitive user interface
- Galvanically isolated Share-Bus for parallel operation of all power classes in the 10000 series
- Master-slave bus for parallel operation of up to 64 units of all power classes in the 10000 series
- Command languages and drivers: SCPI and ModBus, LabVIEW, IVI

Built-in interfaces

- USB
- Ethernet
- Analog
- USB Host
- Master-Slave bus
- Share-Bus

Optional interfaces

- CAN
- CANopen
- RS232
- Profibus
- EtherCAT
- Profinet, with one or two ports
- Modbus, with one or two ports
- Ethernet, with one or two ports

Software

- EA Power Control

Options

- Models for 208 V_{AC} supply

Technical data

General specifications	
AC input	
Voltage, Phases	Standard model: Range 1: 208 V, $\pm 10\%$, 3ph AC Range 2: 380 - 480 V, $\pm 10\%$, 3ph AC US208V model: 208 V, $\pm 10\%$, 3ph AC
Frequency	45 - 65 Hz
Power factor	ca. 0.99
Leakage current	<5 mA
Inrush current *1	Standard model @400 V: ca. 54 A per phase US208V model @208 V: ca. 28 A per phase
Overvoltage category	II
DC input/output static	
Load regulation CV	$\leq 0.05\%$ FS (0 - 100% load, at constant AC input voltage and temperature)
Line regulation CV	$\leq 0.01\%$ FS (208 V - 480 V AC $\pm 10\%$, at constant load and constant temperature)
Stability CV	$\leq 0.02\%$ FS (during 8 h of operation, after 30 minutes of warm-up, at constant AC input voltage, load and temperature)
Temperature coefficient CV	$\leq 30\text{ppm}/^\circ\text{C}$ (after 30 minutes of warm-up)
Compensation (remote sense)	$\leq 5\%$ U_{Nominal}
Load regulation CC	$\leq 0.1\%$ FS (0 - 100% load, at constant AC input voltage and temperature)
Line regulation CC	$\leq 0.01\%$ FS (208 V - 480 V AC $\pm 10\%$, at constant load and constant temperature)
Stability CC	$\leq 0.02\%$ FS (during 8 h of operation, after 30 minutes of warm-up, at constant AC input voltage, load and temperature)
Temperature coefficient CC	$\leq 50\text{ppm}/^\circ\text{C}$ (after 30 minutes of warm-up)
Load regulation CP	$\leq 0.3\%$ FS (0 - 100% load, at constant AC input voltage and temperature)
Load regulation CR	$\leq 0.3\%$ FS + 0.1% FS of current (0 - 100% load, at constant AC input voltage and temperature)
Protective functions	
OVP	Overvoltage protection, adjustable 0 - 110% U_{Nominal}
OCP	Overcurrent protection, adjustable 0 - 110% I_{Nominal}
OPP	Overpower protection, adjustable 0 - 110% P_{Nominal}
OT	Overtemperature protection (DC terminal shuts down in case of insufficient cooling)
DC input/output dynamic	
Rise time 10 - 90% / Fall time 90 - 10%	CV *2: ≤ 10 ms CC *3: ≤ 2 ms
Display & measurement accuracy	
Voltage	$\leq 0.05\%$ FS
Current	$\leq 0.1\%$ FS
Insulation	
AC input to DC terminal	3750 Vrms (1 minute, creepage distance >8 mm) *4
AC input to case (PE)	2500 Vrms
DC terminal to case (PE)	Depending on the model, see model tables
DC terminal to interfaces	1000 V DC (models up to 360 V rating), 1500 V DC (models from 500 V rating)
Interfaces digital	
Built-in, galvanically isolated	USB, Ethernet (100 MBit) for communication, 1x USB host for data acquisition
Optional, galvanically isolated	CAN, CANopen, RS232, ModBus TCP, Profinet, Profibus, EtherCAT, Ethernet
Interface analog	
Built-in, galvanically isolated	15 pole D-Sub
Signal range	0 - 10 V or 0 - 5 V (switchable)
Inputs	U, I, P, R, remote control on/off, DC input/output on/off, resistance mode on/off
Outputs	Monitor U and I, alarms, reference voltage, DC input/output status, CV/CC regulation mode
Accuracy U / I / P / R	0 - 10 V: $\leq 0.2\%$, 0 - 5 V: $\leq 0.4\%$

*1 Calculated for the peak value of the stated voltage including 10% tolerance, at 23°C ambient and first switch-on (cold start)

*2 Valid for power supplies, unidirectional or bidirectional, in source mode operation

*3 Valid for electronic loads or bidirectional power supplies in sink mode operation

*4 Models with up to 80 V DC rating have reinforced insulation while all other models from 200 V DC rating have basic insulation

General specifications	
Device configuration	
Parallel operation	Up to 64 units of any power class in series 10000, with master-slave bus and Share-Bus
Safety and EMC	
Safety	EN 61010-1 IEC 61010-1 UL 61010-1 CSA C22.2 No 61010-1 BS EN 61010-1
EMC	EN 55011, class B (standard models), group 1 or class A, group 1 (US208V models) CISPR 11, class B (standard models), group 1 or class A, group 1 (US208V models) FCC 47 CFR Part 15B, unintentional radiator, class B (standard models) or class A (US208V models) EN 61326-1 include tests according to: - EN 61000-4-2 - EN 61000-4-3 - EN 61000-4-4 - EN 61000-4-5 - EN 61000-4-6
Appliance class	I
Ingress Protection	IP20
Environmental conditions	
Operating temperature *5	0 - 50 °C (32 - 122 °F)
Storage temperature	-20 - 70 °C (-4 - 158 °F)
Humidity	≤80% relative humidity, non-condensing
Altitude	≤2000 m (≤6,600 ft)
Pollution degree	2
Mechanical construction	
Cooling	Forced air flow from front to rear (temperature controlled fans)
Dimensions (W x H x D)	Enclosure: 483 mm (19 in) x 132 mm (3U) x 668 mm (26.3 in) Overall depth: min. 785 mm (min. 31 in)
Weight	5 kW unit: 18 kg (40 lb) 10 kW unit: 25.4 kg (56 lb) 15 kW unit: 32.8 kg (72 lb)

*5 The rated power of the device is available up to approximately +40 °C (104 °F)

Technical specifications	PS 10060-170	PS 10080-170	PS 10200-70	PS 10360-40	PS 10500-30
DC output					
Voltage range	0 - 60 V	0 - 80 V	0 - 200 V	0 - 360 V	0 - 500 V
Ripple in CV (rms)	≤10 mV (BWL 300 kHz *1)	≤10 mV (BWL 300 kHz *1)	≤40 mV (BWL 300 kHz *1)	≤55 mV (BWL 300 kHz *1)	≤70 mV (BWL 300 kHz *1)
Ripple in CV (pp)	≤100 mV (BWL 20 MHz *1)	≤100 mV (BWL 20 MHz *1)	≤300 mV (BWL 20 MHz *1)	≤320 mV (BWL 20 MHz *1)	≤350 mV (BWL 20 MHz *1)
Current range	0 - 170 A	0 - 170 A	0 - 70 A	0 - 40 A	0 - 30 A
Power range *2	0 - 5000 W (0 - 3000 W)	0 - 5000 W (0 - 3000 W)	0 - 5000 W (0 - 3000 W)	0 - 5000 W (0 - 3000 W)	0 - 5000 W (0 - 3000 W)
Resistance range	0.016 Ω - 26 Ω	0.016 Ω - 26 Ω	0.1 Ω - 160 Ω	0.3 Ω - 520 Ω	0.6 Ω - 1000 Ω
Output capacitance	7990 µF	7990 µF	2520 µF	393 µF	180 µF
Efficiency (up to)	94.5% *3	94.5% *3	94.5% *3	95.5% *3	95.5% *3
AC input					
P _{Max} (Standard)	Range 1: 3.5 kW Range 2: 5.5 kW	Range 1: 3.5 kW Range 2: 5.5 kW	Range 1: 3.5 kW Range 2: 5.5 kW	Range 1: 3.5 kW Range 2: 5.5 kW	Range 1: 3.5 kW Range 2: 5.5 kW
P _{Max} (US208V)	6 kW	6 kW	6 kW	6 kW	6 kW
Phase current (Standard) *4	Range 1: ≤29 A Range 2: ≤27 A	Range 1: ≤29 A Range 2: ≤27 A	Range 1: ≤29 A Range 2: ≤27 A	Range 1: ≤29 A Range 2: ≤27 A	Range 1: ≤29 A Range 2: ≤27 A
Phase current (US208V) *4	≤49 A	≤49 A	≤49 A	≤49 A	≤49 A
Insulation					
Negative DC pole <-> PE	±600 V DC	±600 V DC	±1000 V DC	±1000 V DC	±1500 V DC
Positive DC pole <-> PE	+600 V DC	+600 V DC	+1000 V DC	+1000 V DC	+2000 V DC
Product codes					
Standard	06230929	06230930	06230931	06230932	06230933
US208V	06238929	06238930	06238931	06238932	06238933

*1 BWL = Bandwidth limit on the measuring oscilloscope

*2 The value in brackets applies to the state of derating (power reduction) with 208 V ±10% utility

*3 At 100% power and 100% output voltage

*4 Calculated for the default AC supply voltage in the stated range, minus 10% tolerance, at maximum output power and 10% power loss from AC to DC

Technical specifications	PS 10750-20	PS 10920-20 *5			
DC output					
Voltage range	0 - 750 V	0 - 920 V			
Ripple in CV (rms)	≤200 mV (BWL 300 kHz *1)	≤200 mV (BWL 300 kHz *1)			
Ripple in CV (pp)	≤800 mV (BWL 20 MHz *1)	≤800 mV (BWL 20 MHz *1)			
Current range	0 - 20 A	0 - 20 A			
Power range *2	0 - 5000 W (0 - 3000 W)	0 - 5000 W (0 - 3000 W)			
Resistance range	1.2 Ω - 2200 Ω	1.6 Ω - 3300 Ω			
Output capacitance	180 µF	120 µF			
Efficiency (up to)	95.5% *3	95.5% *3			
AC input					
P _{Max} (Standard)	Range 1: 3.5 kW Range 2: 5.5 kW	Range 1: 3.5 kW Range 2: 5.5 kW			
P _{Max} (US208V)	6 kW	6 kW			
Phase current (Standard) *4	Range 1: ≤29 A Range 2: ≤27 A	Range 1: ≤29 A Range 2: ≤27 A			
Phase current (US208V) *4	≤49 A	≤49 A			
Insulation					
Negative DC pole <-> PE	±1500 V DC	±1500 V DC			
Positive DC pole <-> PE	+2000 V DC	+2000 V DC			
Product codes					
Standard	06230934	06230957			
US208V	06238934	06238957			

*1 BWL = Bandwidth limit on the measuring oscilloscope

*2 The value in brackets applies to the state of derating (power reduction) with 208 V ±10% utility

*3 At 100% power and 100% output voltage

*4 Calculated for the default AC supply voltage in the stated range, minus 10% tolerance, at maximum output power and 10% power loss from AC to DC

*5 The data listed below this model name are preliminary

Technical specifications	PS 10060-340	PS 10080-340	PS 10200-140	PS 10360-80	PS 10500-60
DC output					
Voltage range	0 - 60 V	0 - 80 V	0 - 200 V	0 - 360 V	0 - 500 V
Ripple in CV (rms)	≤10 mV (BWL 300 kHz *1)	≤10 mV (BWL 300 kHz *1)	≤40 mV (BWL 300 kHz *1)	≤55 mV (BWL 300 kHz *1)	≤70 mV (BWL 300 kHz *1)
Ripple in CV (pp)	≤100 mV (BWL 20 MHz *1)	≤100 mV (BWL 20 MHz *1)	≤300 mV (BWL 20 MHz *1)	≤320 mV (BWL 20 MHz *1)	≤350 mV (BWL 20 MHz *1)
Current range	0 - 340 A	0 - 340 A	0 - 140 A	0 - 80 A	0 - 60 A
Power range *2	0 - 10000 W (0 - 6000 W)	0 - 10000 W (0 - 6000 W)	0 - 10000 W (0 - 6000 W)	0 - 10000 W (0 - 6000 W)	0 - 10000 W (0 - 6000 W)
Resistance range	0.008 Ω - 13 Ω	0.008 Ω - 13 Ω	0.05 Ω - 80 Ω	0.15 Ω - 260 Ω	0.3 Ω - 500 Ω
Output capacitance	15980 µF	15980 µF	5040 µF	787 µF	360 µF
Efficiency (up to)	94.5% *3	94.5% *3	94.5% *3	95.5% *3	95.5% *3
AC input					
P _{Max} (Standard)	Range 1: 7 kW Range 2: 11 kW	Range 1: 7 kW Range 2: 11 kW	Range 1: 7 kW Range 2: 11 kW	Range 1: 7 kW Range 2: 11 kW	Range 1: 7 kW Range 2: 11 kW
P _{Max} (US208V)	11 kW	11 kW	11 kW	11 kW	11 kW
Phase current (Standard) *4	Range 1: ≤29 A Range 2: ≤27 A	Range 1: ≤29 A Range 2: ≤27 A	Range 1: ≤29 A Range 2: ≤27 A	Range 1: ≤29 A Range 2: ≤27 A	Range 1: ≤29 A Range 2: ≤27 A
Phase current (US208V) *4	≤49 A	≤49 A	≤49 A	≤49 A	≤49 A
Insulation					
Negative DC pole <-> PE	±600 V DC	±600 V DC	±1000 V DC	±1000 V DC	±1500 V DC
Positive DC pole <-> PE	+600 V DC	+600 V DC	+1000 V DC	+1000 V DC	+2000 V DC
Product codes					
Standard	06230935	06230936	06230937	06230938	06230939
US208V	06238935	06238936	06238937	06238938	06238939

*1 BWL = Bandwidth limit on the measuring oscilloscope

*2 The value in brackets applies to the state of derating (power reduction) with 208 V ±10% utility

*3 At 100% power and 100% output voltage

*4 Calculated for the default AC supply voltage in the stated range, minus 10% tolerance, at maximum output power and 10% power loss from AC to DC

Technical specifications	PS 10750-40	PS 10920-40 *5	PS 11000-30	PS 11500-20	
DC output					
Voltage range	0 - 750 V	0 - 920 V	0 - 1000 V	0 - 1500 V	
Ripple in CV (rms)	≤200 mV (BWL 300 kHz *1)	≤200 mV (BWL 300 kHz *1)	≤200 mV (BWL 300 kHz *1)	≤400 mV (BWL 300 kHz *1)	
Ripple in CV (pp)	≤800 mV (BWL 20 MHz *1)	≤800 mV (BWL 20 MHz *1)	≤1000 mV (BWL 20 MHz *1)	≤2000 mV (BWL 20 MHz *1)	
Current range	0 - 40 A	0 - 40 A	0 - 30 A	0 - 20 A	
Power range *2	0 - 10000 W (0 - 6000 W)	0 - 10000 W (0 - 6000 W)	0 - 10000 W (0 - 6000 W)	0 - 10000 W (0 - 6000 W)	
Resistance range	0.6 Ω - 1100 Ω	0.75 Ω - 1600 Ω	1.2 Ω - 2000 Ω	2.6 Ω - 4500 Ω	
Output capacitance	360 µF	240 µF	197 µF	90 µF	
Efficiency (up to)	95.5% *3	95.5% *3	95.5% *3	95.5% *3	
AC input					
P _{Max} (Standard)	Range 1: 7 kW Range 2: 11 kW	Range 1: 7 kW Range 2: 11 kW	Range 1: 7 kW Range 2: 11 kW	Range 1: 7 kW Range 2: 11 kW	
P _{Max} (US208V)	11 kW	11 kW	11 kW	11 kW	
Phase current (Standard) *4	Range 1: ≤29 A Range 2: ≤27 A	Range 1: ≤29 A Range 2: ≤27 A	Range 1: ≤29 A Range 2: ≤27 A	Range 1: ≤29 A Range 2: ≤27 A	
Phase current (US208V) *4	≤49 A	≤49 A	≤49 A	≤49 A	
Insulation					
Negative DC pole <-> PE	±1500 V DC	±1500 V DC	±1500 V DC	±1500 V DC	
Positive DC pole <-> PE	+2000 V DC	+2000 V DC	+2000 V DC	+2000 V DC	
Product codes					
Standard	06230954	06230958	06230955	06230956	
US208V	06238954	06238958	06238955	06238956	

*1 BWL = Bandwidth limit on the measuring oscilloscope

*2 The value in brackets applies to the state of derating (power reduction) with 208 V ±10% utility

*3 At 100% power and 100% output voltage

*4 Calculated for the default AC supply voltage in the stated range, minus 10% tolerance, at maximum output power and 10% power loss from AC to DC

*5 The data listed below this model name are preliminary

Technical specifications	PS 10060-510	PS 10080-510	PS 10200-210	PS 10360-120	PS 10500-90
DC output					
Voltage range	0 - 60 V	0 - 80 V	0 - 200 V	0 - 360 V	0 - 500 V
Ripple in CV (rms)	≤10 mV (BWL 300 kHz *1)	≤10 mV (BWL 300 kHz *1)	≤40 mV (BWL 300 kHz *1)	≤55 mV (BWL 300 kHz *1)	≤70 mV (BWL 300 kHz *1)
Ripple in CV (pp)	≤100 mV (BWL 20 MHz *1)	≤100 mV (BWL 20 MHz *1)	≤300 mV (BWL 20 MHz *1)	≤320 mV (BWL 20 MHz *1)	≤350 mV (BWL 20 MHz *1)
Current range	0 - 510 A	0 - 510 A	0 - 210 A	0 - 120 A	0 - 90 A
Power range *2	0 - 15000 W (0 - 9000 W)	0 - 15000 W (0 - 9000 W)	0 - 15000 W (0 - 9000 W)	0 - 15000 W (0 - 9000 W)	0 - 15000 W (0 - 9000 W)
Resistance range	0.006 Ω - 9 Ω	0.006 Ω - 9 Ω	0.03 Ω - 50 Ω	0.1 Ω - 180 Ω	0.2 Ω - 330 Ω
Output capacitance	23970 µF	23970 µF	7560 µF	1180 µF	540 µF
Efficiency (up to)	94.5% *3	94.5% *3	94.5% *3	95.5% *3	95.5% *3
AC input					
P _{Max} (Standard)	Range 1: 10 kW Range 2: 16 kW	Range 1: 10 kW Range 2: 16 kW	Range 1: 10 kW Range 2: 16 kW	Range 1: 10 kW Range 2: 16 kW	Range 1: 10 kW Range 2: 16 kW
P _{Max} (US208V)	16 kW	16 kW	16 kW	16 kW	16 kW
Phase current (Standard) *4	Range 1: ≤29 A Range 2: ≤27 A	Range 1: ≤29 A Range 2: ≤27 A	Range 1: ≤29 A Range 2: ≤27 A	Range 1: ≤29 A Range 2: ≤27 A	Range 1: ≤29 A Range 2: ≤27 A
Phase current (US208V) *4	≤49 A	≤49 A	≤49 A	≤49 A	≤49 A
Insulation					
Negative DC pole <-> PE	±600 V DC	±600 V DC	±1000 V DC	±1000 V DC	±1500 V DC
Positive DC pole <-> PE	+600 V DC	+600 V DC	+1000 V DC	+1000 V DC	+2000 V DC
Product codes					
Standard	06230920	06230921	06230922	06230923	06230924
US208V	06238920	06238921	06238922	06238923	06238924

*1 BWL = Bandwidth limit on the measuring oscilloscope

*2 The value in brackets applies to the state of derating (power reduction) with 208 V ±10% utility

*3 At 100% power and 100% output voltage

*4 Calculated for the default AC supply voltage in the stated range, minus 10% tolerance, at maximum output power and 10% power loss from AC to DC

Technical specifications	PS 10750-60	PS 10920-60 *5	PS 11000-40	PS 11500-30	PS 12000-20
DC output					
Voltage range	0 - 750 V	0 - 920 V	0 - 1000 V	0 - 1500 V	0 - 2000 V
Ripple in CV (rms)	≤200 mV (BWL 300 kHz *1)	≤200 mV (BWL 300 kHz *1)	≤300 mV (BWL 300 kHz *1)	≤400 mV (BWL 300 kHz *1)	≤400 mV (BWL 300 kHz *1)
Ripple in CV (pp)	≤800 mV (BWL 20 MHz *1)	≤800 mV (BWL 20 MHz *1)	≤1600 mV (BWL 20 MHz *1)	≤2400 mV (BWL 20 MHz *1)	≤2400 mV (BWL 20 MHz *1)
Current range	0 - 60 A	0 - 60 A	0 - 40 A	0 - 30 A	0 - 20 A
Power range *2	0 - 15000 W (0 - 9000 W)	0 - 15000 W (0 - 9000 W)	0 - 15000 W (0 - 9000 W)	0 - 15000 W (0 - 9000 W)	0 - 15000 W (0 - 9000 W)
Resistance range	0.4 Ω - 750 Ω	0.5 Ω - 1100 Ω	0.8 Ω - 1300 Ω	1.7 Ω - 3000 Ω	3.5 Ω - 5300 Ω
Output capacitance	540 µF	360 µF	131 µF	60 µF	60 µF
Efficiency (up to)	95.5% *3	95.5% *3	95.5% *3	95.5% *3	95.5% *3
AC input					
P _{Max} (Standard)	Range 1: 10 kW Range 2: 16 kW	Range 1: 10 kW Range 2: 16 kW	Range 1: 10 kW Range 2: 16 kW	Range 1: 10 kW Range 2: 16 kW	Range 1: 10 kW Range 2: 16 kW
P _{Max} (US208V)	16 kW	16 kW	16 kW	16 kW	16 kW
Phase current (Standard) *4	Range 1: ≤29 A Range 2: ≤27 A	Range 1: ≤29 A Range 2: ≤27 A	Range 1: ≤29 A Range 2: ≤27 A	Range 1: ≤29 A Range 2: ≤27 A	Range 1: ≤29 A Range 2: ≤27 A
Phase current (US208V) *4	≤49 A	≤49 A	≤49 A	≤49 A	≤49 A
Insulation					
Negative DC pole <-> PE	±1500 V DC	±1500 V DC	±1500 V DC	±1500 V DC	±1500 V DC
Positive DC pole <-> PE	+2000 V DC	+2000 V DC	+2000 V DC	+2000 V DC	+2000 V DC
Product codes					
Standard	06230925	06230959	06230926	06230927	06230928
US208V	06238925	06238959	06238926	06238927	06238928

*1 BWL = Bandwidth limit on the measuring oscilloscope

*2 The value in brackets applies to the state of derating (power reduction) with 208 V ±10% utility

*3 At 100% power and 100% output voltage

*4 Calculated for the default AC supply voltage in the stated range, minus 10% tolerance, at maximum output power and 10% power loss from AC to DC

*5 The data listed below this model name are preliminary

General

The DC laboratory power supplies in the PS 10000 series from EA Elektro-Automatik convert the energy from the grid into a regulated DC voltage with an efficiency of up to 96%. The PS 10000 series includes single and three phase units, which, together with the wide input range, allows use with practically all global mains voltages. The DC voltage and current are directed by the application and the spectrum ranges from 0 - 60 V to 0 - 2000 V and from 0 - 6 A up to 0 - 1000 A in a single device. The DC supply operates as a flexible output stage with a constant power characteristic (autoranging), and a wide voltage, current and power range. To achieve higher power and current all units are equipped with a master-slave bus. This enables up to 64 parallel connected devices to be combined into one system which can provide up to 1920 kW and 64000 A. Such a system works as a single unit and can use different power classes, only the voltage class must remain constant. In this way a user can construct a 75 kW system from two 30 kW 4U and one 15 kW 3U device from the PS 10000 range. Furthermore, typical laboratory functionality is provided. This includes an extensive function generator, alarm and warning management, various industrial interfaces, software solutions and many more functions.

AC connection


The DC power supplies in the PS 10000 series are equipped with an active PFC which provides a high efficiency at a low energy consumption. Furthermore, the devices in this series provide a wide input voltage range. It reaches from 110/120 V up to 240 V with 1-phase models and from 208 V to 380/400/480 V with 3-phase models. Hence the devices can be operated in the majority of global grids. They adjust automatically, without additional configuration, to the available grid voltage by applying a derating of the DC input power. The separately available US208V models, however, provide the full rated power at a supply with 208 V.

DC output

The DC output of the power supplies in series PS 10000 3U is rated for DC voltages of 0 - 60 V up to 0 - 2000 V, allowing currents of 0 - 20 A up to 0 - 510 A. The flexible output stages (autoranging) provide the user with a wide voltage, current and power range and hence a wider field of working than traditional power supplies.

DC connection

Connection of the DC output is done via copper blades on the back side of the device. If a system with higher performance is required, the devices are simply connected in parallel. With minimal effort devices can be linked with the vertical copper rails. A cover for contact protection is provided.

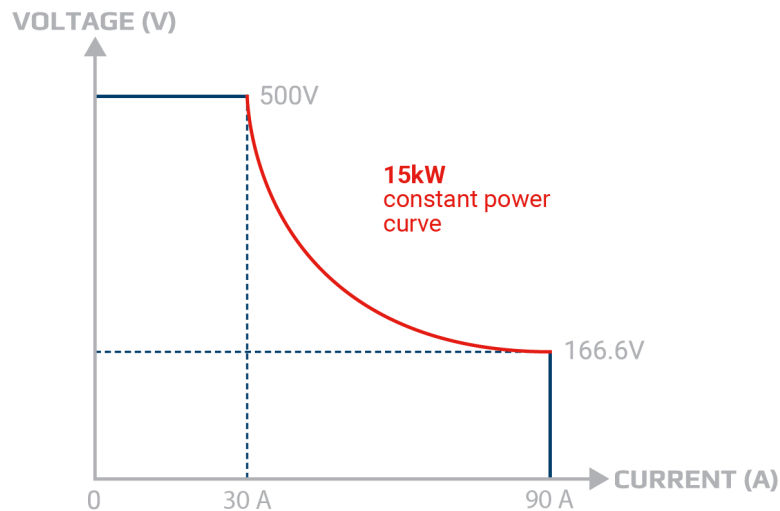

The principle of autoranging

„Autoranging“ is a term used when a programmable DC power supply automatically offers a wider output range of both, voltage and current, to maintain full power across a wide operation range. This type of solution allows the use of a single unit to address multiple voltage and current combinations.

Interfaces

As standard, 10000s series devices are fitted with the most important interfaces and ports which are all galvanically isolated from the DC input. There is an analog interface which can be parameterized for input and output, control and monitoring of 0 - 5 V or 0 - 10 V for voltage, current, power and resistance, assorted inputs and outputs as well as USB and Ethernet ports. Further optional industrial interface for plug & play slot complete the portfolio:

- CAN
- CANopen
- RS232
- Profibus
- EtherCAT
- Profinet, with one or two ports
- Modbus, with one or two ports
- Ethernet, with one or two ports

High performance systems

High power applications can be covered with high power systems of up to 960 kW. These are achieved by using the outputs of many PS 10000 3U devices and connecting them in parallel using copper rails. A 19" cabinet with a height of 42U can hold up to 12 units of 3U and thus form a system of up to 180 kW occupying only 0.6 m² (6.5 sqft) of floor space. The master/slave bus allows for up to 6 cabinets with a maximum of 64 units and up to 15 kW each to behave as one unit.

Master-slave bus and Share-Bus

When the integrated master-slave bus and Share-Bus are used, a multi device system behaves as a single device. The buses are simply connected between each device. With the master-slave bus the system data, such as total power and total current, are collected and displayed on the master unit. Warnings and alarms of the slave devices are also clearly displayed. The Share-Bus cares for a balanced load distribution between the individual units.



Example representation

In this illustration you can see a fully assembled and wired 240 kW system, realized with 30 kW 4U units.

Applications




Relay test in the production

Relay manufacturers must carry out assorted tests on their products during production. For these the coils and contacts are provided with exactly defined voltage and current. For the coil tests, important parameters such as operating, holding and decay current, together with the associated voltages must be checked and documented. For the contacts, not only are the current carrying capability and contact resistance important parameters, but also voltage consistency and disconnect threshold indicate much about the product quality. Testing all these is best supported by an automatic test system. A part of such a system can be the devices of the PS 10000 series with their exact, dynamic, controls of voltage, current, power, and resistance, providing optimal values for the best test results. With their diverse interface connections, they can be integrated into any test system and deliver the necessary data without the need for additional measuring equipment.


On-board charger test

In an on-board charger test (OBC) the electrical features of the charger must be tested under various conditions. This requires a flexible test system which also provides test data. With the sequencing and logging functions of the software EA-Power Control it allows data to be exported and saved. In this way applications can instantly generate reproducible test results based on dynamic and highly accurate set point and measurement data. To avoid competition between two separate control loops of the device under test (DUT) and the testing device, the voltage regulation speed of the power supply is adjustable. The modes Normal, Fast and Slow allow the PS 10000 devices to be adapted the control characteristics of the on-board charger. Due to the fact that a power supply can only operate as a source, the combination with a sink, here an electronic DC load of ELR 10000 series, might be required.

Technical drawings PS 10000 3U ≤200 V

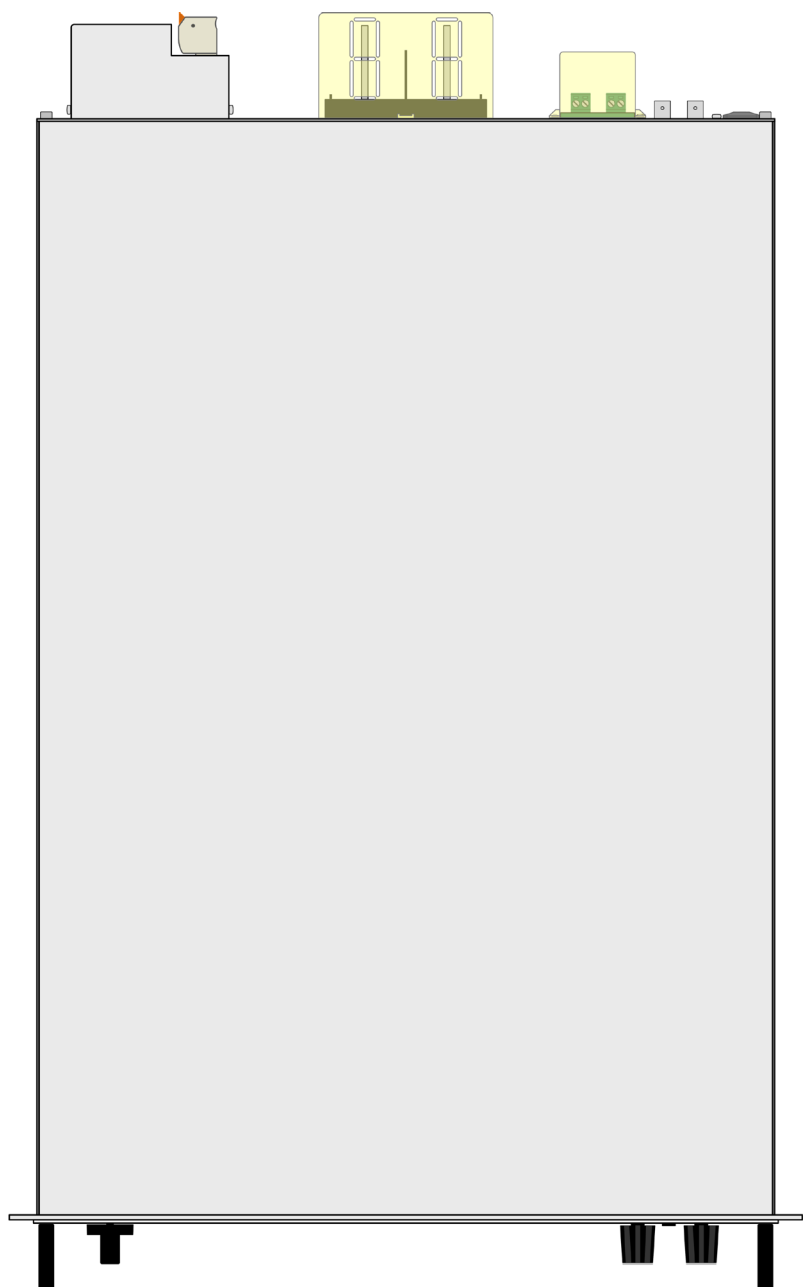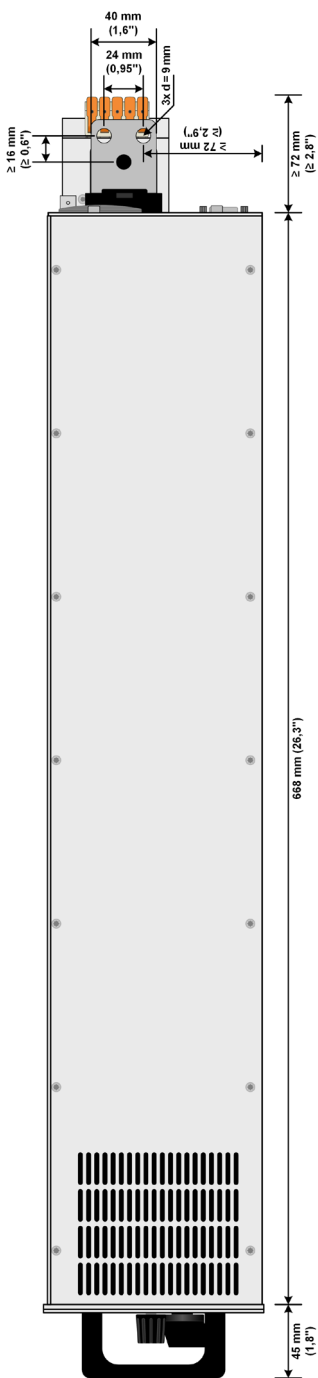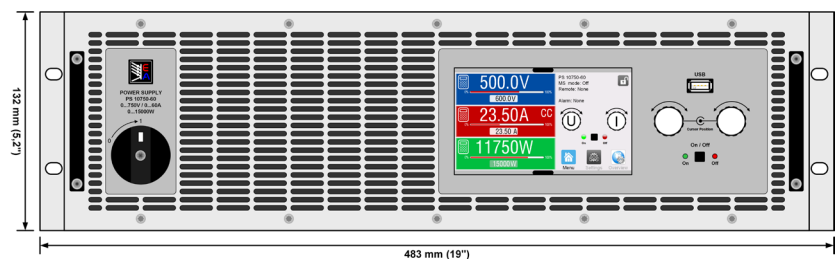


Front panel description PS 10000 3U

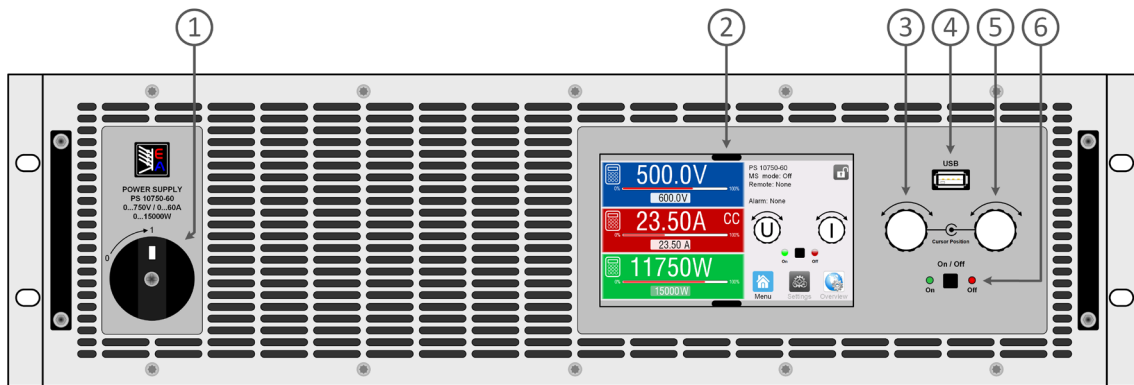


1. Power switch
2. TFT control interface, interactive operation and display
3. Rotary knob with push-button action, for settings and control
4. USB host, uses USB sticks for data logging and sequencing
5. Rotary knob with push-button action, for settings and control
6. On / Off push-button with LED status display

Rear panel description PS 10000 3U $\leq 200\text{ V}$

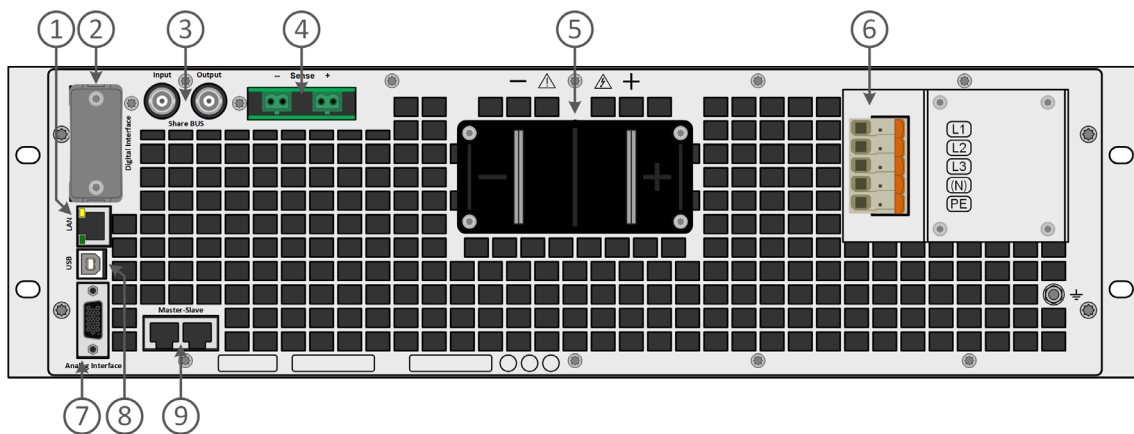


1. Ethernet interface
2. Slot for interfaces
3. Share-Bus connectors to set up a system for parallel connection
4. Remote sense connectors
5. DC output terminal (copper blades)
6. AC input connector
7. Connector (DB15 female) for isolated analog programming, monitor and other functions
8. USB interface
9. Master-slave bus connectors to set up a system for parallel connection

Technical drawings PS 10000 3U ≥360 V

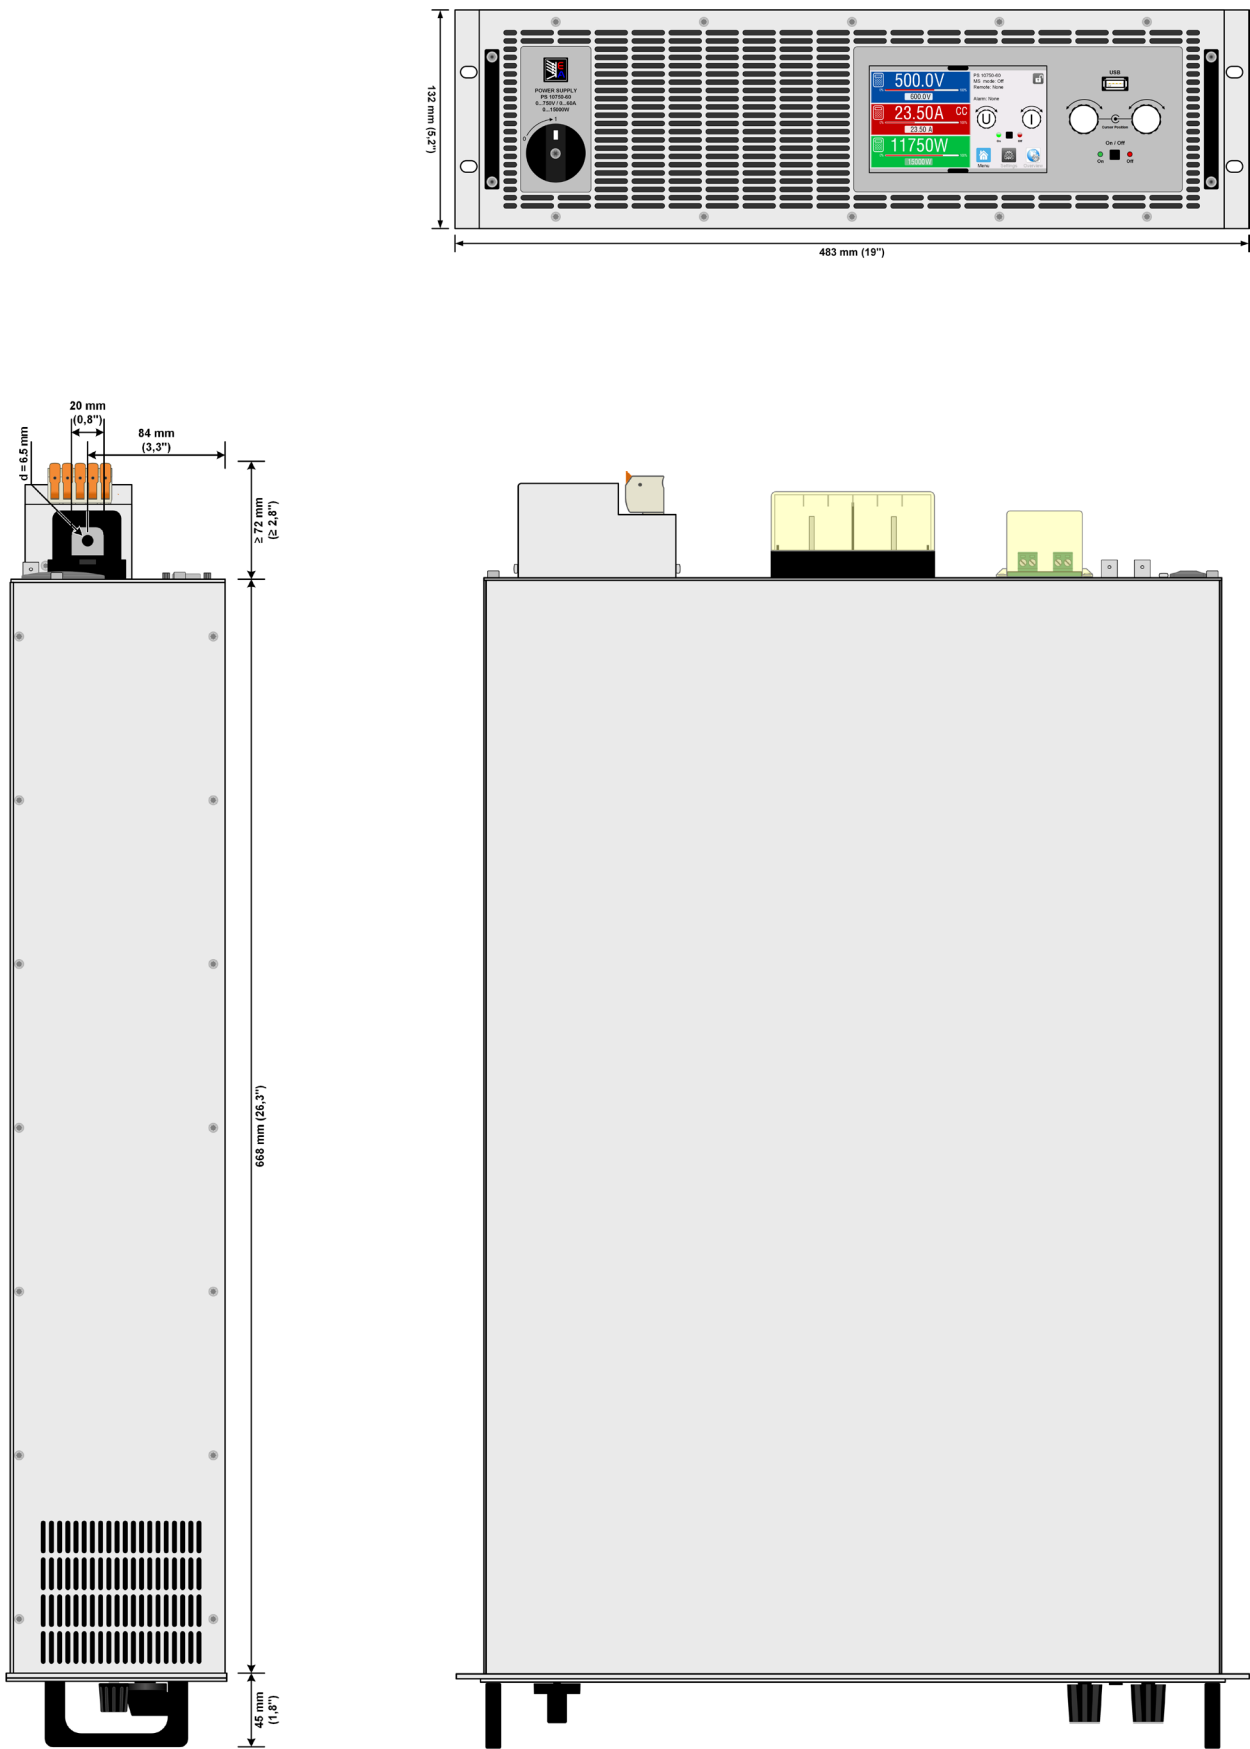


Front panel description PS 10000 3U

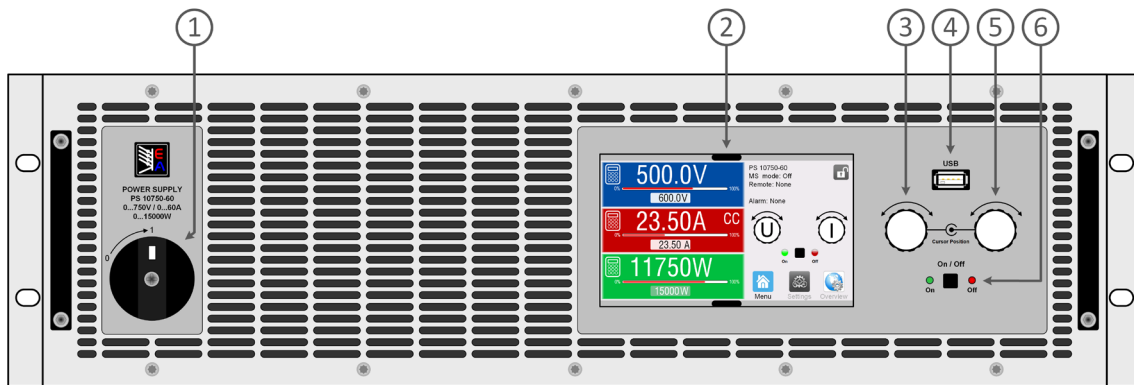

1. Power switch
2. TFT control interface, interactive operation and display
3. Rotary knob with push-button action, for settings and control
4. USB host, uses USB sticks for data logging and sequencing
5. Rotary knob with push-button action, for settings and control
6. On / Off push-button with LED status display

Rear panel description PS 10000 3U ≥ 360 V

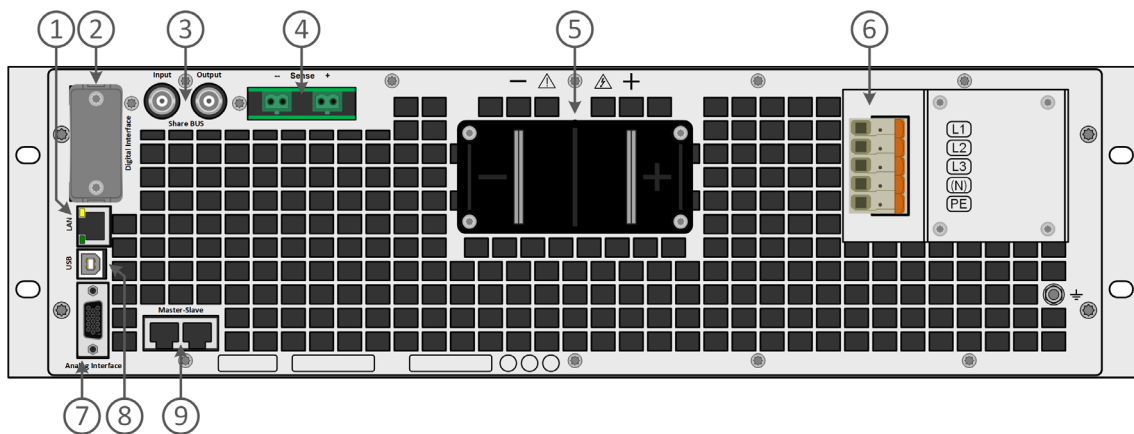

1. Ethernet interface
2. Slot for interfaces
3. Share-Bus connectors to set up a system for parallel connection
4. Remote sense connectors
5. DC output terminal (copper blades)
6. AC input connector
7. Connector (DB15 female) for isolated analog programming, monitor and other functions
8. USB interface
9. Master-slave bus connectors to set up a system for parallel connection

EA Elektro-Automatik GmbH &
Helmholtzstr. 31-37
41747 Viersen
Germany

Phone: +49 2162 3785 - 0
ea1974@elektroautomatik.com

www.elektroautomatik.com
www.tek.com

