

# ARGUS<sup>®</sup> 240

O P T I C A L X P O N T E S T E R

GPON

XGS-PON

xPON-ID

FTTH

Sel. OPM

FIT

OLS

VFL

2.5GigE

SFP

WLAN

Data  
101101011011

IP TV

Vo IP

Speed test

Ookla<sup>®</sup>


RFC  
6349



data sheet: technical data subject to change.

**intec**

GESELLSCHAFT FÜR  
INFORMATIONSTECHNIK mbH

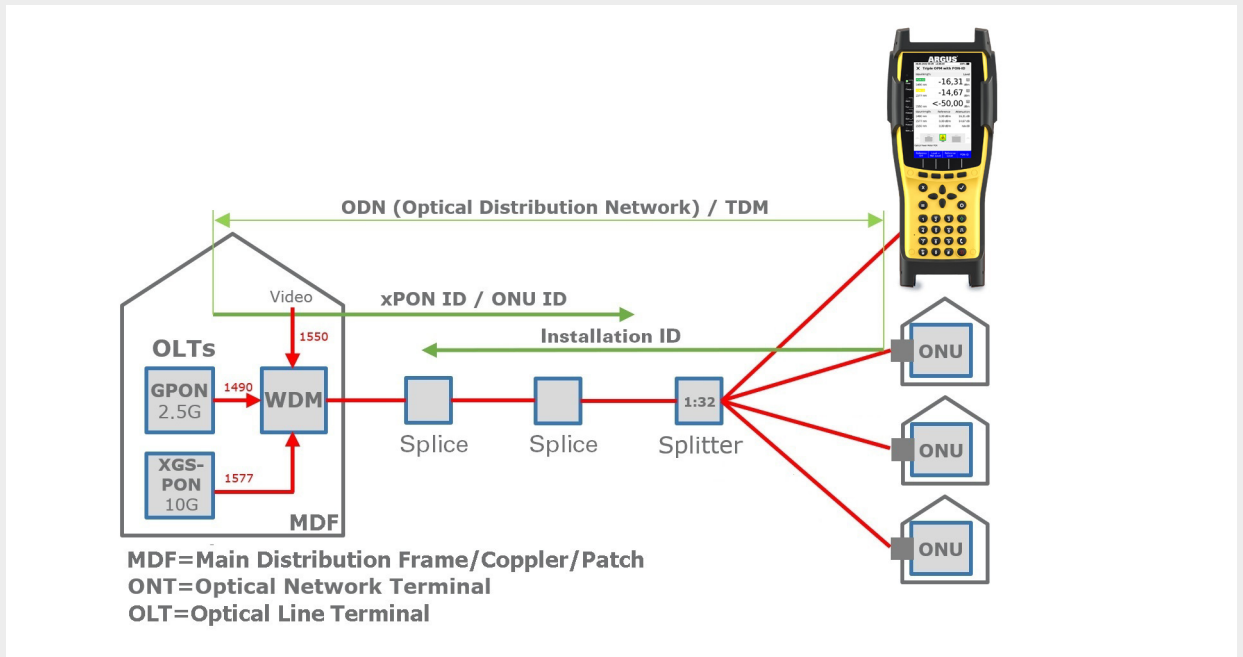

### ARGUS® 240: The optical xPON tester

The new ARGUS® 240 optical xPON tester delivers improved performance for testing mixed optical fiber accesses. The high-quality multifunction tester is ideally equipped for the expansion of future networks.

### Modern design and new housing concept

Its robust design combines the requirements for a compact hand-held meter in daily field use with the performance of a high-end tester. The ARGUS® tester with touch-screen display enables intuitive navigation of the familiar ARGUS® menu structure. Thanks to the use of numerous graphical elements, the redesigned GUI makes this sophisticated multifunction tester as easy to use as a smartphone. A new, innovative internal help function supports rapid, reliable interpretation of test results.

### Tests on mixed optical fiber accesses

The ARGUS® 240 reliably tests GPON and XGS-PON interfaces in the uncompromising quality you have come to expect. It is also equipped with a wide range of further interfaces and test functions, such as WLAN, speed tests, triple play and many more.

### Additional features

The integrated WIFI interface enables the ARGUS® 240 to communicate with its environment directly - a PC link is no longer required. Once integrated in your job management system, the ARGUS® 240 marks the advent of a new generation of broadband testing.

### intec Gesellschaft für Informationstechnik mbH

intec Gesellschaft für Informationstechnik mbH has been successfully developing products for the international telecom markets for more than 30 years. Meanwhile specialized in high-quality telecommunication measuring devices, we belong to the leading suppliers of fiber optic, G.fast, xDSL and IP measuring technology in Europe and beyond.

Our ARGUS® testers are ideal for developing and documenting new fiber optic infrastructure for the rapid expansion of modern optical networks. They simplify day-to-day work in the maintenance and testing of modern copper-based broadband interfaces as well as in the fiber-optic sector and support troubleshooting and fault location.

Our customers have appreciated the quality of our products and services for many years. This trust in our products has enabled us to supply more than 100,000 ARGUS® testers throughout the world during the last 20 years – a large majority of which have been delivered to international companies such as Deutsche Telekom, Vodafone, Telefonica, KPN or A1 Telekom Austria.

data sheet: technical data subject to change.



**ARGUS® MADE IN GERMANY**

Specifications Fiber Tests:

General: Application, Settings + Results:			
<b>Selective xPON-OPM</b> for GPON / XGS-PON	<ul style="list-style-type: none"> <li>Measuring range:                             <ul style="list-style-type: none"> <li>1577 &amp; 1490 nm (filtered): from -40 to +6 dBm</li> <li>1270 to 1625 nm (broadband): from -50 to +10 dBm</li> </ul> </li> <li>Accuracy: ±0,5 dB</li> <li>Calibration conditions: -20 dBm, 23°C ±5 K</li> </ul>	<ul style="list-style-type: none"> <li>Connector: SC/APC, SFP+, LAN4 10 GBase-T</li> <li>Readout of PON ID and XGS-PON ID* via SC/APC, detection up to:                             <ul style="list-style-type: none"> <li>GPON ≥ -30 dBm</li> <li>XGS-PON ≥ -28 dBm</li> </ul> </li> </ul> <p>* The network must provide the ID for this.</p>	<ul style="list-style-type: none"> <li>Full ONT simulation (GPON ONT or XGS-PON ONT) via additional GPON/ XGS-PON SFP transceiver module</li> <li>IP/Performance tests via SFP+, LAN4 10/5/2.5/1 GBase-T, 100Base-Tx with up to 1 Gbit/s (max. 2.5 Gbit/s)</li> </ul>
<b>GPON Tester</b>	GPON Modem Simulation, ONT, CPE ITU-T G.984 via GPON Transceiver <ul style="list-style-type: none"> <li>GigaBit Passive Optical Network DDM accord. to SFF-8472 (see Ethernet)</li> </ul>	<ul style="list-style-type: none"> <li>Link Status / Link Speed</li> <li>ONT Status / OLT Tx Power</li> <li>Optical Network Unit ID (ONU ID)</li> <li>Passive Optical Network ID (PON ID, Vendor + Equipment ID / Version)</li> <li>GPON Bridge/Router*</li> </ul>	<ul style="list-style-type: none"> <li>GPON Status Trace</li> <li>Serial Number / Password Configurable</li> <li>Scan PLOAM message (ONU ID, S/N)*</li> <li>SFP: Digital Diagnostic Mode (DDM)</li> <li>Optical Level (Rx), ±3 dB</li> <li>Optical Line Attenuation in dB</li> </ul>
<b>XGS-PON Tester</b>	XGS-PON Modem Simulation, ONT, CPE ITU-T G.9807.1 via XGS-PON Transceiver <ul style="list-style-type: none"> <li>10 GigaBit Symmetric Passive Optical Network DDM accord. to SFF-8472 (see Ethernet)</li> </ul>	<ul style="list-style-type: none"> <li>Link Status / Link Speed</li> <li>ONT Status / OLT Tx Power</li> <li>Optical Network Unit ID (ONU ID)</li> <li>Passive Optical Network ID (PON ID, Vendor + Equipment ID / Version)</li> <li>XGS-PON Bridge/Router*</li> </ul>	<ul style="list-style-type: none"> <li>XGS-PON Status Trace</li> <li>Serial Number / Password Configurable</li> <li>Scan PLOAM message (ONU ID, S/N)*</li> <li>SFP: Digital Diagnostic Mode (DDM)</li> <li>Optical Level (Rx), ±3 dB</li> <li>Optical Line Attenuation in dB</li> </ul>
<b>Fiber Inspection Tool</b> Video Microscope	<ul style="list-style-type: none"> <li>USB Microscope for the ARGUS</li> <li>optical Fiber Inspection</li> <li>manual Focusing with separate key</li> <li>optional: Autofocus</li> <li>digital Zoom</li> </ul>	<ul style="list-style-type: none"> <li>Pass /Fail evaluation according to IEC 61300-3-35</li> <li>min. Particle Size 0.5 µm</li> <li>Defects: Core, Cladding, Adhesive, Contact</li> </ul>	<ul style="list-style-type: none"> <li>Scratches: Core, Cladding, Adhesive, Contact</li> <li>different Tips /Adapters included in scope of delivery</li> <li>PC, UPC, APC</li> <li>Single Mode /Multi Mode</li> </ul>
<b>VFL</b> Visual Fault Locator	<ul style="list-style-type: none"> <li>Mini Visual Laser Source</li> <li>Output Power: ≥ 1 mW</li> <li>Detecting Range: about 5 km</li> </ul>	<ul style="list-style-type: none"> <li>Wavelength: 650 nm</li> <li>Laser Level: Class IIIA</li> <li>Connector: Un/FC (optional)</li> </ul>	<ul style="list-style-type: none"> <li>Modulation Frequency: CW / 2 Hz</li> <li>Power Supply: 2 * AAA batteries</li> </ul>
<b>Optical Light Source</b>	<ul style="list-style-type: none"> <li>Wavelength: 1310 nm, 1490 nm, 1550 nm +1625 nm (± 20 nm)</li> <li>Stability:                             <ul style="list-style-type: none"> <li>Short term (15 min): 1310 nm &lt; ±0,05 dB 1490 nm &lt; ±0,10 dB 1550 nm &lt; ±0,05 dB 1625 nm &lt; ±0,10 dB</li> <li>Long term (5 h): 1310 nm &lt; ±0,10 dB 1490 nm &lt; ±0,20 dB 1550 nm &lt; ±0,10 dB 1625 nm &lt; ±0,20 dB</li> </ul> </li> </ul>	<ul style="list-style-type: none"> <li>Connector: SC/APC with dust protection and protection against loss</li> <li>Spectral width: 5 nm</li> <li>Frequency: 270 Hz, 1 KHz, 2 KHz</li> <li>Auto wavelength: protocol-based wavelength and TX power transmission</li> <li>Power: -5 dBm ±0.5 dB</li> </ul>	<ul style="list-style-type: none"> <li>Auto power off / backlight</li> <li>Power supply: 2x Ni-MH AA (2500 mAh), AC/DC charger</li> <li>Dimension (L x W x H): 160 x 76 x 45 mm</li> <li>Net weight: 270 g</li> <li>Accessories: AC/DC charger, 2 x AA battery, calibration report</li> </ul>

data sheet: technical data subject to change.

Further specifications:

General:		Application, Settings + Results:	
<b>GigE Tester</b>	<p>Ethernet according to IEEE 802.3</p> <p>LAN:</p> <p>RJ45 interface (8P8C)</p> <ul style="list-style-type: none"> <li>• 10/100/1000 Base-T</li> <li>• 2.5 GBase-T (IEEE 802.3bz, NBase-T)</li> <li>• 5/10 GBASE-T (5/10 GbE), 5000/10000 BASE-T, (MGBASE-T) (IEEE 802.3ak, IEEE 802.3an)</li> </ul> <p>SFP: full-fledged SFP+ interface (FTTx, PtP)</p> <ul style="list-style-type: none"> <li>• 100 Base-FX/LX (IEEE 802.3 Clause 26/58)</li> <li>• 1000 Base-BX/LX/SX/ZX Active Ethernet (IEEE 802.3 Clause 38 bzw. 802.3z)</li> <li>• 2,5 GBase-X (2,5GigE/2,5GbE)</li> </ul> <p>10 GBASE-X (10GbE/10GE), 10000 BASE-X (IEEE 802.3ae)</p>	<ul style="list-style-type: none"> <li>• Link Status, Autonegotiation, far/near</li> <li>• Auto-MDI(X) Function</li> <li>• Speed (10, 100, 1000, 2500, 10000 Mbit/s)</li> <li>• Duplex Mode (full, half)</li> <li>• Flow Control</li> <li>• Polarity/Wire Pair (+/-)</li> <li>• Pair skew/Wire Pair [ns]</li> <li>• Frames (Rx/Tx) [Number]</li> <li>• Errors, Bytes (Rx/Tx) [Number]</li> <li>• Collisions [Number]</li> </ul>	<ul style="list-style-type: none"> <li>• SFP: Digital Diagnostic Mode (DDM)                             <ul style="list-style-type: none"> <li>- DDM nach SFF-8472</li> <li>- Manufacturer Name, OUI, Item Number, Revision</li> <li>- Serial Number, Date, Coding, Medium, Speed</li> <li>- Optical Level (Tx/Rx), ±3 dB</li> <li>- Optical class of the OLT</li> <li>- Optical, PWR (Tx/Rx), ±3 dB</li> <li>- Temperature, Voltage, Current (Tx)</li> <li>- Max. Cable Length (Cu,SM,MM/OM1-4)</li> </ul> </li> </ul>
<b>WLAN</b>	<p>WLAN Access Point Mode</p> <p>WLAN Client Mode</p> <p>IEEE 802.11b/g/n (2.4 GHz)</p> <p>IEEE 802.11a/an/ac (5 GHz)*</p> <ul style="list-style-type: none"> <li>• via WLAN USB Stick or</li> <li>• internal FPC Antenna</li> <li>• WEP to WPA2 Enterprise</li> </ul>	<ul style="list-style-type: none"> <li>• WLAN Access Point Scan                             <ul style="list-style-type: none"> <li>- Number / List Access Points</li> <li>- Number 2.4 GHz / 5 GHz Networks</li> <li>- Network/Name (SSID)</li> <li>- Signal Strength (RSSI) [dBm]</li> <li>- Signal Quality [%]</li> <li>- MAC Address of AP</li> <li>- Used Channel/Frequency</li> <li>- Used Protocol</li> <li>- Negotiated Encryption</li> <li>- Authentication</li> <li>- Group Cipher, Pairwise Cipher</li> </ul> </li> </ul>	<ul style="list-style-type: none"> <li>• Access Point Mode (WLAN Router) for mobile devices</li> <li>- IP Tests (Data, VoIP, IPTV)</li> <li>• AP Management (save etc.)</li> <li>• Test Result Upload via Web Server, WebDAV and FTP</li> <li>• Configuration Download via WebDAV and FTP</li> <li>• Remote Control via VNC, Web Server</li> <li>- Firmware Update via FTP Download</li> </ul>
<b>ARGUS® WLAN Analyzer</b>	<ul style="list-style-type: none"> <li>• Displaying the networks during existing WLAN connection</li> <li>• Manual evaluation of channels possible in tabular and graphical form</li> </ul>	<ul style="list-style-type: none"> <li>• Searching for networks again during existing WLAN connection</li> </ul>	<ul style="list-style-type: none"> <li>• Advanced automated evaluation of found networks and display of all AP info</li> </ul>
<b>WLAN spectrum analysis</b>	<ul style="list-style-type: none"> <li>• optional: ARGUS® 2G4 Scope graph. WLAN spectrum analysis for 2.4 GHz for the specific WLAN troubleshooting</li> </ul>	<ul style="list-style-type: none"> <li>• Real-time Analysis /Graphics</li> <li>• passive (no WLAN Interference)</li> <li>• Channel Load</li> <li>• Graphical representation</li> </ul>	<ul style="list-style-type: none"> <li>• Detection of                             <ul style="list-style-type: none"> <li>- Bluetooth Devices</li> <li>- Motion Sensors</li> <li>- Microwave Ovens</li> <li>- Baby Phones</li> </ul> </li> </ul>

data sheet: technical data subject to change.

Specifications Protocol and IP tests (Triple Play):

General:	Applications, Settings + Results:	
<b>Protocol Tests</b>	<ul style="list-style-type: none"> <li>Configurable MAC Address</li> <li>Use of Virtual Lines (VL): Maximum Flexibility as well as Control and Priorization under Real Conditions by Several VLs simultaneously</li> <li>One VL/Service each (Data, VoIP, IPTV, opt.)</li> <li>VL Configurable in Profiles (20)                             <ul style="list-style-type: none"> <li>IP, PPPoE</li> <li>VLAN (Modus, ID, Prio., TPID)</li> <li>PPP Profiles (Username, Password)</li> <li>IP Version (IPv4, IPv6, Dual) + DHCP</li> <li>Automatic receiving of connection-dependent dial-in data: PPP, VoIP (phone number)</li> </ul> </li> </ul>	<ul style="list-style-type: none"> <li>Display of BRAS Information                             <ul style="list-style-type: none"> <li>AC Name, Service Name, Session ID</li> </ul> </li> <li>Display of PPP Information                             <ul style="list-style-type: none"> <li>PPP Packets/Bytes (Tx/Rx)</li> <li>PPP Trace (PPP Commands, Time)</li> </ul> </li> <li>Display of IP Information                             <ul style="list-style-type: none"> <li>IPv6: Global Unicast/Link Local Address</li> <li>IPv4: Assigned IP, Gateway, DNS</li> </ul> </li> <li>Recording of a Data Log for Evaluation on PC (e.g. Wireshark)</li> </ul>
<b>Data Tests (Download Tester)</b>	<ul style="list-style-type: none"> <li>Memory with up to 10 IP Addresses, (IPv4/6 Address as Number or Name)</li> <li>Number of Pings, Pause Configurable (Ping), Packet Size + Fragmentation Configurable</li> <li>Traceroute: Max. Hops, Probes + Timeout Conf.</li> <li>Down-/Upload: Server Profiles (10): Server Addr., File Name/Size, Number, Number of Parallel Downloads Configurable                             <ul style="list-style-type: none"> <li>FTP: Username + Password</li> </ul> </li> <li>Display Results IP Ping                             <ul style="list-style-type: none"> <li>Display of Packets (Tx/Rx/repeated)</li> <li>Checksum Error [Number]</li> <li>Error Packets [Number]</li> </ul> </li> <li>Display Results Traceroute                             <ul style="list-style-type: none"> <li>Current Hop + Probe / List of Hops</li> <li>Response Time of Hops [s]</li> <li>IP Address of Current Hops</li> </ul> </li> </ul>	<ul style="list-style-type: none"> <li>Round Trip Time (min/max/avg) [ms]</li> <li>Display Results Down- /Upload                             <ul style="list-style-type: none"> <li>Current/Total Number [Number]</li> <li>Already Loaded Data [%]</li> <li>Average Speed [Mbit/s]</li> <li>Loaded Bytes [MB]</li> <li>Transfer Time /Remaining Time [h:min:s]</li> </ul> </li> <li>Speedtest<sup>®</sup> by Ookla                             <ul style="list-style-type: none"> <li>Download /Upload Speed</li> <li>Latency, Jitter, Packet Loss</li> <li>Server Selection via Server ID</li> </ul> </li> <li>iperf v2 /3                             <ul style="list-style-type: none"> <li>Client /Server Mode</li> <li>TCP Throughput Down- /Upload</li> <li>ARGUS<sup>®</sup> against ARGUS<sup>®</sup></li> </ul> </li> <li>ARGUS<sup>®</sup> Real Speed                             <ul style="list-style-type: none"> <li>Evaluation according to RFC 6349</li> </ul> </li> </ul>
<b>VoIP Tests (VoIP Tester)</b>	<ul style="list-style-type: none"> <li>Configuration in VoIP Profiles (20): SIP Username, Password, Registrar Server, Outbound Proxy/SBC, Domain, Listen + Remote Port, Authentication, Caller ID, User Agent, Qualify, Process of Registration</li> <li>Phone Settings: RTP Port Area, Silence Detection, Jitterbuffer, Codecs, DTMF</li> <li>STUN Server</li> <li>MOS Threshold for OK/Fail Evaluation</li> <li>VoIP QoS, Layer 3 Diffserv: RTP/SIP: ToS, DSCP</li> <li>VoIP QoS, Layer 2 VLAN Prio.: RTP/SIP: VLAN Prio.</li> <li>Codecs: G.726 (16/24/32/40), G.729 (A/B), G.711 (a-law/μ-law), G.722</li> <li>Display of Own Number, Number of Called Person</li> </ul>	<ul style="list-style-type: none"> <li>Duration of Connection [h:min:s]</li> <li>MOS Plain Text Evaluation, According to E Model R Factor, ITU-T G. 107 (current/avg), MOS (current/avg/min/max/ideal)</li> <li>Statistics: RTP Packets (Tx/Rx),</li> <li>Error Counter: RTP Drop, RTP Error</li> <li>RTP Jitter Rx (current/avg/min/max)</li> <li>Lost RTP Packets (avg/min/max)</li> <li>RTCP Contents:                             <ul style="list-style-type: none"> <li>RTP Jitter far (current/avg/min/max) [ms]</li> <li>Lost RTP Packets of Remote Side</li> <li>Network Delay (current/avg/min/max) [ms]</li> <li>Display of Registration Details: SIP Codes, Registrar IP, Proxy, URI</li> </ul> </li> <li>Simulation (VoIP NT)</li> </ul>

data sheet: technical data subject to change.

General:	Applications, Settings + Results:	
<b>IPTV Tests (IPTV Tester)</b> IPTV Device Simulation IPTV STB Simulation (Set-top Box) OK/Fail Evaluation IPTV Channel Scan IPTV Monitor (IPTV passive)	<ul style="list-style-type: none"> <li>• Configuration in IPTV Profiles (3): Editable Channel List (up to 250 Channels), Multicast IP + Port, Channel Name, IGMP version</li> <li>• Thresholds for IPTV OK/Fail-Evaluation: IGMP Latency, Sync Error, PCR Jitter, Error Indication, CC Errors, CC Error Rate, Audio + Video Bytes, RTP Jitter, RTP Sequence Error, Current + Total RTP Loss Rate</li> <li>• Different VLs for IGMP + RTP</li> <li>• Scan Profiles (3) Configurable: max. Zapping Time</li> <li>• Display of Selected IPTV Channel, Test Duration, current Bitrate, OK or Fail</li> <li>• Packets Loss (current/min/max/avg) [Number]</li> </ul>	<ul style="list-style-type: none"> <li>• RTP/UDP Packet Loss Rate [%]</li> <li>• Delay [ms] + Delay Factor [ms]</li> <li>• Media Loss Rate (MLR) [%]</li> <li>• IP Address of Channel + Port</li> <li>• IGMP Latency (Activation Time) [ms]</li> <li>• For Correlation: xDSL CRC Counters</li> <li>• RTP Errors, RTP Sequence Errors</li> <li>• MPEG Bitrate + Packets (min/max/...), Bytes (current/min/max/...), PCR Jitter (current/min/max/avg) [ms], CC Errors + Error Rate (current/max) [%], Error Sync + Indication</li> <li>• Codecs and PIDs (Packet Identifier)</li> <li>• Channel Zapping Time (min/max/avg) [ms]</li> </ul>

data sheet: technical data subject to change.

## Documentation and Analysis

- **Documentation** of all parameters recorded to test reports (in device and on PC) via automatic access tests
- Transfer of test results via **QR code** to a smartphone or via **WLAN** to cloud (FTP server)
- Free of charge firmware updates via **cloud** or **ARGUS update tool** ([www.argus.info](http://www.argus.info))
- **WLAN** for transf. test results to systems of an electronic order processing system, access point mode (browsing, download), remote control via smartphone

## Device Specifications

### Technical Features:

- |                             |  |
|-----------------------------|--|
| • <b>Power</b>              | Li-Ion battery pack or plug-in mains adapter         |
| • <b>Power management</b>   | User configurable                                    |
| • <b>Keypad</b>             | 18 keys, 4 cursor keys, 4 context-sensitive softkeys |
| • <b>TFT colour display</b> | 800 x 480 pixels, backlit, incl. touchscreen         |
| • <b>6 LEDs</b>             | Indicating the status + Ethernet port LEDs           |
| • <b>Handset</b>            | Integrated earpiece and microphone                   |
| • <b>ARGUSpedia</b>         | Integrated help function                             |
| • <b>CE marking</b>         | Complies with CE directives                          |
| • <b>User safety</b>        | Fulfills EN 60950-1:2006-11                          |
| • <b>RoHS conformance</b>   | Conformance according to WEEE directive              |

### Interfaces:

- |  |                      |
|--|----------------------|
| • <b>USB client interface, 2x USB host interface</b> | Type micro B, Type A |
| • <b>WLAN</b>  | IEEE802.11a/b/g/n    |

### Environmental conditions:

- |   |  |
|---|--|
| • <b>Temperature range for charging battery pack</b>    | 0 °C (+32 °F) up to +40 °C (+104 °F)   |
| • <b>Max. Operating temperature (endurance tests)</b>   | 0 °C (+32 °F) up to +40 °C (+104 °F)   |
| • <b>Max. Operating temperature (in battery mode)</b>   | -10 °C (+14 °F) up to +50 °C (+122 °F) |
| • <b>Operating temperature (with power/car adapter)</b> | 0 °C (+32 °F) up to +40 °C (+104 °F)   |
| • <b>Storing Temperature</b>                            | -20 °C (-4 °F) up to +60 °C (+140 °F)  |
| • <b>Relative humidity</b>                              | Up to 95 %, non-condensing             |

### Dimensions:

- |                 |   |
|-----------------|---|
| • <b>Size</b>   | H x W x D: 300 x 128 x 84 mm (11.81 x 5.04 x 3.31 in) |
| • <b>Weight</b> | <1.400 g (3.09 lbs) ARGUS incl. battery pack          |

data sheet: technical data subject to change.

## Standard Package:

Basic device incl. Selective xPON OPM, Wi-Fi-Management, IP tests (IP ping, traceroute test, HTTP/FTP download, FTP upload/server), Web browser, Cloud services, Lithium-Ion battery pack, Mains adaptor, Shock absorbing rubber jacket, Carrying case, SC/LC measuring cable, Micro USB cable, Carrying strap, Hand strap and English manual

## Additional Options:

• GPON-ONT for xPON-OPM	incl. stick	Order number: 024102
• XGS-PON-ONT for xPON-OPM	incl. stick	Order number: 024103
• Optical Light Source (OLS)		Order number: 000280
• Fiber Inspection option	w/o Fiber Inspection Tool	Order number: 024094
• Wi-Fi Test Interface	w/o Wi-Fi USB stick (000250)	Order number: 024059
• ARGUS® WLAN Analyzer	requires WLAN basic	Order number: 024054
• ARGUS® 2G4 Scope (2.4 GHz Spectrum Analysis)	incl. USB 2G4 Scope stick	Order number: 000240
• VoIP Option	incl. MOS value, Call generator, NT Sim., SIP trunk	Order number: 024060
• IPTV Option	incl. IPTV STB mode, IPTV passive, channel scan	Order number: 024065
• Triple Play package	incl. VoIP and IPTV Option	Order number: 024067
• ARGUS® Real Speed	RFC 6349, incl. iperf v2/ v3	Order number: 024056
• iperf v2/ v3	Client/ Server	Order number: 024068
• Speedtest up to 2.5 Gbit/s	incl. HTTP/FTP download, FTP upload/server, Ookla	Order number: 024105

\* We would be glad to provide further details and information about additional accessories on request.

data sheet: technical data subject to change.



GESELLSCHAFT FÜR  
INFORMATIONSTECHNIK mbH

Rahmedestraße 90  
D-58507 Lüdenscheid

Tel: +49 2351 9070-0

Fax: +49 2351 9070-70

E-Mail: sales@argus.info

Internet: www.argus.info