

ARGUS[®] 260

B R O A D B A N D T E S T E R

GPON

XGS-PON

xPON-ID

FTTH

PON
Installation

Sel.
OPM

OFF

FIT

OLS

VFL

G.fast

VDSL

ADSL

Bonding

2.5GigE

SFP

WLAN

POTS

ISDN

Data
101101011011

Cu

IP
TV

TDR

Vo
IP

RFL

Speed
test

Remote
kit

Ookla[®]

Line
Scope

RFC
6349




data sheet: technical data subject to change.

intec

GESELLSCHAFT FÜR
INFORMATIONSTECHNIK mbH

Where to use the ARGUS?

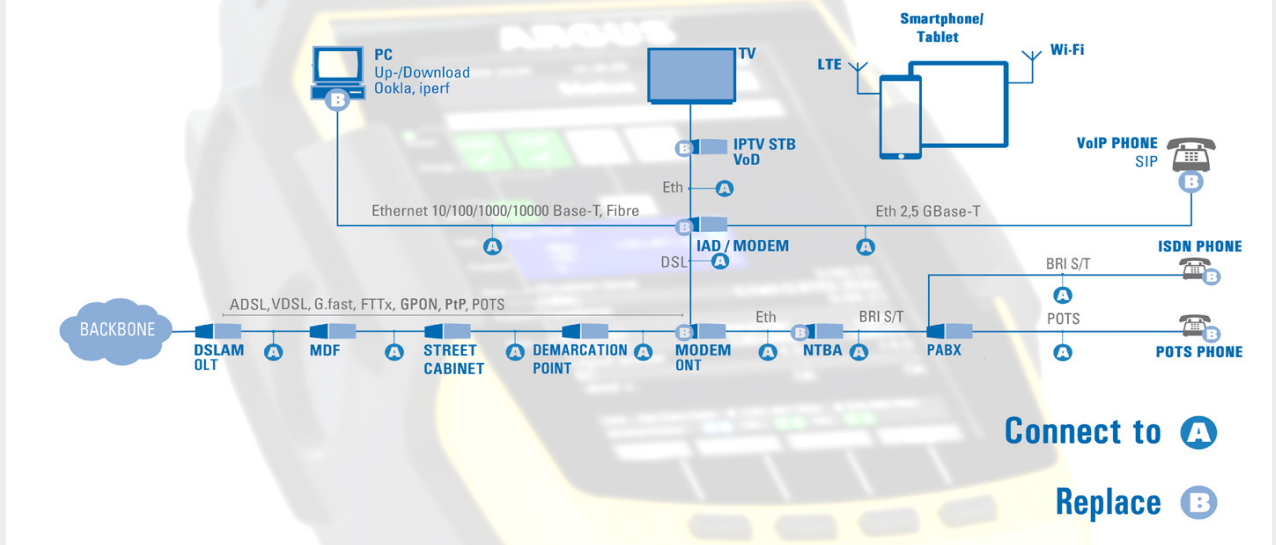

ARGUS® 260: The broadband tester

The new ARGUS® 260 all-in-one tester delivers improved performance for testing broadband interfaces. The high-quality multifunction tester is ideally equipped for the expansion of future networks.

Modern design and new housing concept

Its robust design combines the requirements for a compact hand-held meter in daily field use with the performance of a high-end tester. As the first ARGUS® tester with touch-screen display, it enables intuitive navigation of the familiar ARGUS® menu structure. Thanks to the use of numerous graphical elements, the redesigned GUI makes this sophisticated multifunction tester as easy to use as a smartphone. A new, innovative internal help function supports rapid, reliable interpretation of test results.

All necessary broadband interfaces

The ARGUS® 260 reliably tests all broadband interfaces, from GPON and G.fast (106 + 212 MHz) to super vectoring, Bonding, ADSL and VDSL accesses, in the uncompromising quality you have come to expect. It is also equipped with a wide range of further interfaces and test functions, such as 2.5 Gigabit Ethernet, WLAN, copper, TDR, RFL, triple play and many more.

Additional features

The integrated WIFI interface enables the ARGUS® 260 to communicate with its environment directly - a PC link is no longer required.

Once integrated in your job management system, the ARGUS® 260 marks the advent of a new generation of broadband testing.


intec Gesellschaft für Informationstechnik mbH

intec Gesellschaft für Informationstechnik mbH has been successfully developing products for the international telecom markets for more than 30 years. Meanwhile specialized in high quality telecommunication measuring devices, we belong to the leading suppliers of fiber optic, G.fast, xDSL and IP measuring technology in Europe and beyond.

Our ARGUS® testers are ideal for developing and documenting new fiber optic infrastructure for the rapid expansion of modern optical networks. They simplify day-to-day work in the maintenance and testing of modern copper-based broadband interfaces as well as in the fiber-optic sector and support troubleshooting and fault location.

Our customers have appreciated the quality of our products and services for many years. This trust in our products has enabled us to supply more than 100,000 ARGUS® testers throughout the world during the last 20 years – a large majority of which have been delivered to international companies such as Deutsche Telekom, Vodafone, Telefonica, KPN or A1 Telekom Austria.

data sheet: technical data subject to change.

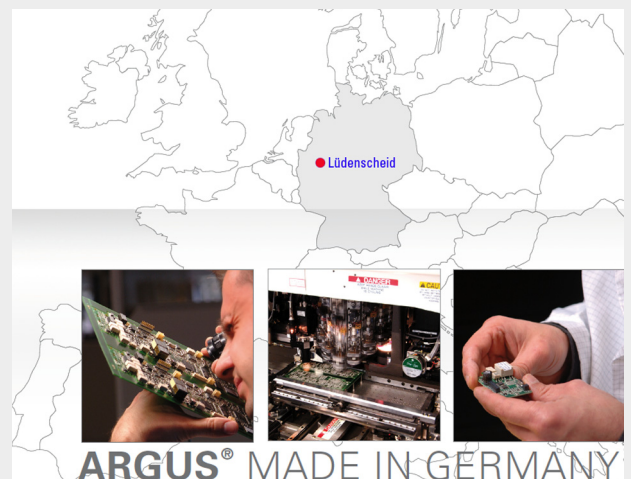

ARGUS® MADE IN GERMANY

Specification Broadband Interfaces:

General:		Application, Settings + Results:	
G.fast Tester	G.fast Modem Simulation, FTU-R, CPE G.fast Bridge + G.fast Router ITU-T G.9700/9701 Profile 106a/212a Time Division Duplexing (TDD)	G.fast / VDSL / ADSL	G.fast / VDSL
VDSL Tester	VDSL2 Modem Simulation, VTU-R, CPE VDSL2 Bridge + VDSL2 Router ITU-T G.993.2 (Profiles 8, 12, 17a, 30a) ITU-T G.993.2 Annex Q (Profile 35b), Super Vectoring (Vplus) ITU-T G.993.5, G.vector (Vectoring) ITU-T G.998.4, G.INP (Retransmission) ITU-T G.998.2, G.bond, 35b Bonding	<ul style="list-style-type: none"> Net Data Rate d/u [kBit/s] Attainable Data Rate d/u [kBit/s] Relative Capacity d/u [%] SNR Margin /Loop Attenuation d/u [dB] Output Power d/u [dBm] Interleave Delay d/u [ms] Impulse Noise Protection d/u [Symbols] FEC + CRC, far/near [Errors] ES, SES, LOSS + UAS, far/near [sec] Reset /Resync [Number] Bitswap Events d/u Retransmission d/u (G.INP) Vendor, far/near [Name/ Number] Modem Trace Bits/SNR/QLN/Hlog/Noise Graphs OK /Fail Evaluation: Bitrate, CRC, FEC DC Voltage, UDC 	<ul style="list-style-type: none"> Signal Attenuation [dB] Showtime no Sync [Number] Seamless Rate Adaption (SRA) Data Transmission Unit (DTU) INP REIN + INP SHINE [Symbols] Expected Throughput Rate (ETR) [kBit/s] Electrical Length @1 MHz R/C [dB] EFM Statistics: Frames + Bytes
ADSL Tester	ADSL Modem Simulation, ATU-R, CPE ADSL Bridge + ADSL Router ITU-T G.992.1, Annex A+B (ADSL) ITU-T G.992.2, Annex A (G.lite) ITU-T G.992.3, Annex A+B+L+M (ADSL2) ITU-T G.992.5, Annex A+B+J+M (ADSL2+)	<ul style="list-style-type: none"> Link Status, Autonegotiation, far/near Auto-MDIX Function Speed (10, 100, 1000 Mbit/s) Duplex Mode (full, half) / Flow Control Polarity/Wire Pair (+/-) Pair skew/Wire Pair [ns] Frames (Rx/Tx) [Number] Errors, Bytes (Rx/Tx) [Number] Collisions [Number] 	<ul style="list-style-type: none"> Vectoring Mode Graphical Long-time Trace in ARGUS[®]
GigE Tester	Ethernet according to IEEE 802.3 1 x 10/100/1000 Base-T (RJ45/8P8C) • 2.5 GBase-T (IEEE 802.3bz, NBase-T) 1 x SFP Interface, supports: • 100 Base-FX/LX • 1000 Base-BX/LX/SX/ZX • 2.5 GBase-T (IEEE 802.3bz, NBase-T) • FTTx (PtP), Active Ethernet DDM according to SFF-8472	<ul style="list-style-type: none"> Link Status / Link Speed ONT Status / OLT Tx Power Optical Network Unit ID (ONU ID) Passive Optical Network ID (PON ID, Vendor + Equipment ID / Version) 	<ul style="list-style-type: none"> SFP: Digital Diagnostic Mode (DDM): - Manufacturer Name, OUI, Item Number, Revision, Serial Number, Date, Coding, Medium, Speed - Optical Level (Tx/Rx), ±3 dB - Optical class of the OLT - Optical, PWR (Tx/Rx), ±3 dB - Temperature, Voltage, Current (Tx) - Max. Cable Length (Cu, SM, MM/OM1-4)
GPON Tester	GPON Modem Simulation, ONT, CPE ITU-T G.984 via ARGUS [®] GPON ONT • GigaBit Passive Optical Network DDM accord. to SFF-8472 (see Ethernet)	<ul style="list-style-type: none"> guided measurement sequence target attenuation can be entered as threshold value automatic OK /Fail evaluation PDF measurement protocol SFP parameters (s. Eth/GPON) 	<ul style="list-style-type: none"> GPON Modem Trace Serial Number / Password Configurable Scan PLOAM message (ONU ID, S/N)* SFP: Digital Diagnostic Mode (DDM) Optical Level (Rx), ±0.7 dB Optical Line Attenuation in dB
PON installation test	GPON installation test PON level check		<ul style="list-style-type: none"> calibrated measurement of the insertion loss with ±0.5 dB accuracy Assistance for up to 64 fibers Evaluation PON-ID Query of the job data
WLAN	WLAN Access Point Mode WLAN Client Mode IEEE 802.11b/g/n (2.4 GHz) IEEE 802.11a/an/ac (5 GHz)* • via WLAN USB Stick or • internal FPC Antenna • WEP to WPA2 Enterprise	<ul style="list-style-type: none"> WLAN Access Point Scan - Number / List Access Points - Number 2.4 GHz / 5 GHz Networks - Network/Name (SSID) - Signal Strength (RSSI) [dBm] - Signal Quality [%] - MAC Address of AP - Used Channel/Frequency - Used Protocol - Negotiated Encryption - Authentication - Group Cipher, Pairwise Cipher 	<ul style="list-style-type: none"> Access Point Mode (WLAN Router) for mobile devices - IP Tests (Data, VoIP, IPTV) AP Management (save etc.) Test Result Upload via Web Server, WebDAV and FTP Configuration Download via WebDAV and FTP Remote Control via VNC, Web Server - Firmware Update via FTP Download
ARGUS[®] WLAN Analyzer	<ul style="list-style-type: none"> Displaying the networks during existing WLAN connection Manual evaluation of channels possible in tabular and graphical form 	<ul style="list-style-type: none"> Searching for networks again during existing WLAN connection 	<ul style="list-style-type: none"> Advanced automated evaluation of found networks and display of all AP info
WLAN spectrum analysis	<ul style="list-style-type: none"> optional: ARGUS[®] 2G4 Scope graph. WLAN spectrum analysis for 2.4 GHz for the specific WLAN trouble-shooting 	<ul style="list-style-type: none"> Real-time Analysis /Graphics passive (no WLAN Interference) Channel Load Graphical representation 	<ul style="list-style-type: none"> Detection of - Bluetooth Devices - Motion Sensors - Microwave Ovens - Baby Phones

data sheet: technical data subject to change.

Specifications Protocol and IP tests (Triple Play):

General:	Applications, Settings + Results:	
Protocol Tests	<ul style="list-style-type: none"> Configurable MAC Address Use of Virtual Lines (VL): Maximum Flexibility as well as Control and Priorization under Real Conditions by Several VLs simultaneously One VL/Service each (Data, VoIP, IPTV, opt.) VL Configurable in Profiles (20) <ul style="list-style-type: none"> IP, PPPoE via xDSL, G.fast + Eth (PPTP) EoA, IPoA, PPPoA via ADSL VPI/VCI, VLAN (Modus, ID, Prio., TPID) PPP Profiles (Username, Password) IP Version (IPv4, IPv6, Dual) + DHCP Automatic receiving of connection-dependent dial-in data: PPP, VoIP (phone number) 	<ul style="list-style-type: none"> Display of BRAS Information <ul style="list-style-type: none"> AC Name, Service Name, Session ID Display of PPP Information <ul style="list-style-type: none"> PPP Packets/Bytes (Tx/Rx) PPP Trace (PPP Commands, Time) Display of IP Information <ul style="list-style-type: none"> IPv6: Global Unicast/Link Local Address IPv4: Assigned IP, Gateway, DNS Recording of a Data Log for Evaluation on PC (e.g. Wireshark)
Data Tests (Download Tester) PC/Terminal Simulation IP Ping Test Traceroute Test HTTP Up-/Download Test FTP Up-/Download Test FTP Server Test Webbrowser Ookla iperf ARGUS® Real Speed	<ul style="list-style-type: none"> Memory with up to 10 IP Addresses, (IPv4/6 Address as Number or Name) Number of Pings, Pause Configurable (Ping), Packet Size + Fragmentation Configurable Traceroute: Max. Hops, Probes + Timeout Conf. Down-/Upload: Server Profiles (10): Server Addr., File Name/Size, Number, Number of Parallel Downloads Configurable <ul style="list-style-type: none"> FTP: Username + Password Display Results IP Ping <ul style="list-style-type: none"> Display of Packets (Tx/Rx/repeated) Checksum Error [Number] Error Packets [Number] Display Results Traceroute <ul style="list-style-type: none"> Current Hop + Probe / List of Hops Response Time of Hops [s] IP Address of Current Hops 	<ul style="list-style-type: none"> Round Trip Time (min/max/avg) [ms] Display Results Down- /Upload <ul style="list-style-type: none"> Current/Total Number [Number] Already Loaded Data [%] Average Speed [Mbit/s] Loaded Bytes [MB] Transfer Time /Remaining Time [h:min:s] Speedtest® by Ookla <ul style="list-style-type: none"> Download /Upload Speed Latency, Jitter, Packet Loss Server Selection via Server ID iperf v2 /3 <ul style="list-style-type: none"> Client /Server Mode TCP Throughput Down- /Upload ARGUS® against ARGUS® ARGUS® Real Speed <ul style="list-style-type: none"> Evaluation according to RFC 6349
VoIP Tests (VoIP Tester) IP Telephone Simulation Testing of VoIP Connections incl. Acoustics (dif. Codecs) MOS Evaluation (ITU-T P.800) Call Generator (up to 30 Calls)	<ul style="list-style-type: none"> Configuration in VoIP Profiles (20): SIP Username, Password, Registrar Server, Outbound Proxy/SBC, Domain, Listen + Remote Port, Authentication, Caller ID, User Agent, Qualify, Process of Registration Phone Settings: RTP Port Area, Silence Detection, Jitterbuffer, Codecs, DTMF STUN Server MOS Threshold for OK/Fail Evaluation VoIP QoS, Layer 3 Diffserv: RTP/SIP: ToS, DSCP VoIP QoS, Layer 2 VLAN Prio.: RTP/SIP: VLAN Prio. Codecs: G.726 (16/24/32/40), G.729 (A/B), G.711 (a-law/μ-law), G.722 Display of Own Number, Number of Called Person 	<ul style="list-style-type: none"> Duration of Connection [h:min:s] MOS Plain Text Evaluation, According to E Model R Factor, ITU-T G. 107 (current/avg), MOS (current/avg/min/max/ideal) Statistics: RTP Packets (Tx/Rx), Error Counter: RTP Drop, RTP Error RTP Jitter Rx (current/avg/min/max) Lost RTP Packets (avg/min/max) RTCP Contents: <ul style="list-style-type: none"> RTP Jitter far (current/avg/min/max) [ms] Lost RTP Packets of Remote Side Network Delay (current/avg/min/max) [ms] Display of Registration Details: SIP Codes, Registrar IP, Proxy, URI Simulation (VoIP NT)
IPTV Tests (IPTV Tester) IPTV Device Simulation IPTV STB Simulation (Set-top Box) OK/Fail Evaluation IPTV Channel Scan IPTV Monitor (IPTV passive)	<ul style="list-style-type: none"> Configuration in IPTV Profiles (3): Editable Channel List (up to 250 Channels), Multicast IP + Port, Channel Name, IGMP version Thresholds for IPTV OK/Fail-Evaluation: IGMP Latency, Sync Error, PCR Jitter, Error Indication, CC Errors, CC Error Rate, Audio + Video Bytes, RTP Jitter, RTP Sequence Error, Current + Total RTP Loss Rate Different VLs for IGMP + RTP Scan Profiles (3) Configurable: max. Zapping Time Display of Selected IPTV Channel, Test Duration, current Bitrate, OK or Fail Packets Loss (current/min/max/avg) [Number] 	<ul style="list-style-type: none"> RTP/UDP Packet Loss Rate [%] Delay [ms] + Delay Factor [ms] Media Loss Rate (MLR) [%] IP Address of Channel + Port IGMP Latency (Activation Time) [ms] For Correlation: xDSL CRC Counters RTP Errors, RTP Sequence Errors MPEG Bitrate + Packets (min/max/...), Bytes (current/min/max/...), PCR Jitter (current/min/max/avg) [ms], CC Errors + Error Rate (current/max) [%], Error Sync + Indication Codecs and PIDs (Packet Identifier) Channel Zapping Time (min/max/avg) [ms]

data sheet: technical data subject to change.

Specifications Fiber Tests:

General:	Applications, Settings + Results:	
ARGUS OPM Optical Power Meter	<ul style="list-style-type: none"> Optical Power Meter in SFP form factor Powerful InGaAs Photo Diode Optical Level Measurement with wavelengths from 850, 1300, 1310, 1490, 1550, 1610, 1650 nm Measuring range: -60 dBm up to +6 dBm, ± 0.25 dB 	<ul style="list-style-type: none"> Live display of the level Storage of the measurement in measurement protocols Output in QR code Robust and protected by use in SFP slot Optional Calibration at 1310, 1490 and 1550 nm (-20 dBm), 20 °C
Selective xPON-OPM for GPON / XGS-PON	<ul style="list-style-type: none"> Measuring range: <ul style="list-style-type: none"> 1577 & 1490 nm (filtered): from -40 to +6 dBm 1270 to 1625 nm (broadband): from -50 to +10 dBm Accuracy: $\pm 0,5$ dB Calibration conditions: -20 dBm, 23°C ± 5 K Connector: SC/APC, SFP+, LAN4 10 GBase-T <p>* The network must provide the ID for this.</p>	<ul style="list-style-type: none"> Readout of PON ID and XGS-PON ID* via SC/APC, detection up to: <ul style="list-style-type: none"> GPON ≥ -30 dBm XGS-PON ≥ -28 dBm Full ONT simulation (GPON ONT or XGS-PON ONT) via additional GPON/XGS-PON SFP transceiver module IP/Performance tests via SFP+, LAN4 10/5/2.5/1 GBase-T, 100Base-Tx with up to 1 Gbit/s (max. 2.5 Gbit/s)
Optical Fault Finder	<ul style="list-style-type: none"> simple fault finder detects different types of optical faults up to 15 event with one test 	<ul style="list-style-type: none"> distance to every event robust and protected by use in SFP slot
Fiber Inspection Tool Video Microscope	<ul style="list-style-type: none"> USB Microscope for the ARGUS optical Fiber Inspection manual Focusing with separate key optional: Autofocus digital Zoom Pass /Fail evaluation according to IEC 61300-3-35 	<ul style="list-style-type: none"> min. Particle Size 0.5 μm Defects: Core, Cladding, Adhesive, Contact Scratches: Core, Cladding, Adhesive, Contact different Tips /Adapters included in scope of delivery PC, UPC, APC Single Mode /Multi Mode
VFL Visual Fault Locator	<ul style="list-style-type: none"> Mini Visual Laser Source Output Power: ≥ 1 mW Detecting Range: about 5 km Wavelength: 650 nm 	<ul style="list-style-type: none"> Laser Level: Class IIIA Connector: Un/FC (optional) Modulation Frequency: CW / 2 Hz Power Supply: 2 * AAA batteries
Optical Light Source	<ul style="list-style-type: none"> Wavelength: 1310 nm, 1490 nm, 1550 nm +1625 nm (± 20 nm) Stability: <ul style="list-style-type: none"> Short term (15 minutes): <ul style="list-style-type: none"> 1310 nm $< \pm 0,05$ dB 1490 nm $< \pm 0,10$ dB 1550 nm $< \pm 0,05$ dB 1625 nm $< \pm 0,10$ dB Long term (5 hours): <ul style="list-style-type: none"> 1310 nm $< \pm 0,10$ dB 1490 nm $< \pm 0,20$ dB 1550 nm $< \pm 0,10$ dB 1625 nm $< \pm 0,20$ dB Connector: SC/APC with dust protection and protection against loss 	<ul style="list-style-type: none"> Spectral width: 5 nm Frequency: 270 Hz, 1 KHz, 2 KHz Auto wavelength: protocol-based wavelength and TX power transmission Power: -5 dBm ± 0.5 dB Auto power off / backlight Power supply: 2x Ni-MH AA (2500 mAh), AC/DC charger Dimension (L x W x H): 160 x 76 x 45 mm Net weight: 270 g Accessories: AC/DC charger, 2 x AA battery, calibration report

Specifications ISDN:

General:	Applications, Settings + Results:	
BRI S Interface ITU-T I.430 BRI S Terminal BRI S Telephone BRI S TE Simulation	<ul style="list-style-type: none"> BRI S TE Mode, Terminal device simulation Autom. Detection of Connection Configuration L2 Mode: automatic, P-P, P-MP Test Availability of B Channels BRI S Level and Voltage Evaluation Protocol: DSS1 	<ul style="list-style-type: none"> Display L1, L2 and L3 of B Channel Status incoming /outgoing Call Display of Call Parameters own Acoustics Connection: Call (Single/Block Dial)

Specifications POTS:

General:	Applications, Settings + Results:	
POTS Tester Analogue Tester POTS Butt Set POTS Terminal Simulation POTS Monitor	<ul style="list-style-type: none"> Fully-fledged POTS Butt Set, POTS Phone POTS Terminal Equipment (TE) Analogue Phone w/ DTMF + Pulse Dial Incl. Fully-fledged Analogue Acoustics High-impedance Listening on POTS Configurable DTMF Signal Level 	<ul style="list-style-type: none"> Voltage Measurement + Display Polarity when Hook-on and Hook-off CLIP + Caller-ID according to ETS 300 659/778 Supports FSK + Display of Caller ID FLASH Function (40 up to 1000 ms)

data sheet: technical data subject to change.

Specifications Cable Multimeter:

General:			
	Measuring Range	Resolution	Accuracy
DC Voltage; UDC (U =):	<ul style="list-style-type: none"> 0 V to 9.99 V 10 V to 200 V 	<ul style="list-style-type: none"> 0.01 V 0.1 V 	<ul style="list-style-type: none"> ± (0.5 % + 2 digits) ± (0.5 % + 2 digits)
AC Voltage; UAC (U ~):	<ul style="list-style-type: none"> 0 V to 9.99 V 10 V to 200 V <p>Frequency: 10 Hz to 200 Hz; 0.2 Hz; ±(1.5 % + 2 digits), sinus</p>	<ul style="list-style-type: none"> 0.01 V 0.1 V 	<ul style="list-style-type: none"> ± (2 % + 2 digits) ± (1.5 % + 2 digits)
Capacitive Symmetry Balance; CSym:	<ul style="list-style-type: none"> 10 nF to 4 µF <p>Dielectric strength for external voltage up to 17 V DC or 17 V AC (with a load 200 kΩ).</p>	<ul style="list-style-type: none"> 0.01 nF 	<ul style="list-style-type: none"> 0.1 % of the capacity against ground
Capacitance; C:	<ul style="list-style-type: none"> 0.01 nF to 9.99 nF 10 nF to 99.99 nF 100 nF to 999.9 nF 1 µF to 8 µF <p>Dielectric strength for external voltage up to 17 V DC or 17 V AC (with a load 200 kΩ). Measured by film capacitors.</p>	<ul style="list-style-type: none"> 0.01 nF 0.01 nF 0.1 nF 1 nF 	<ul style="list-style-type: none"> ± (4 % + 4 digits) ± (4 % + 4 digits) ± (3 % + 1 digit) ± (3 % + 1 digit)
Isolation Resistance (105 V, max. 2 mA); Iso:	<ul style="list-style-type: none"> 0.1 kΩ to 99.9 kΩ 100 kΩ to 999 kΩ 1 MΩ to 9.99 MΩ 10 MΩ to 99.9 MΩ 100 MΩ to 1 GΩ <p>Dielectric strength for external voltage up to 5 V DC or 30 V AC (with a load 200 kΩ).</p>	<ul style="list-style-type: none"> 0.1 kΩ 1 kΩ 10 kΩ 100 kΩ 100 kΩ 	<ul style="list-style-type: none"> ± (2 % + 1 digit) ± (2 % + 1 digit) ± (2 % + 1 digit) ± (5 % + 1 digit) ± (5 % + 1 digit)
Isolation Resistance (8 V, max. 8 mA); Iso:	<ul style="list-style-type: none"> 0.1 kΩ to 99.9 kΩ 100 kΩ to 999 kΩ 1 MΩ to 9.99 MΩ 10 MΩ to 40 MΩ <p>Dielectric strength for external voltage up to 5 V DC or 30 V AC (with a load 200 kΩ).</p>	<ul style="list-style-type: none"> 0.1 kΩ 1 kΩ 10 kΩ 100 kΩ 	<ul style="list-style-type: none"> ± (2 % + 1 digit) ± (2 % + 1 digit) ± (2 % + 1 digit) ± (5 % + 1 digit)
Resistive Symmetry Balance; RSym:	<ul style="list-style-type: none"> 10 Ω to 5 kΩ <p>Dielectric strength for external voltage up to 30 V DC or 30 V AC (with a load 200 kΩ).</p>	<ul style="list-style-type: none"> 0.1 Ω 	<ul style="list-style-type: none"> 0.2 % of Rs ± 0.2 Ω
Loop Resistance; R: (13 V, max. 15 mA)	<ul style="list-style-type: none"> 1 Ω to 999.9 Ω 1 kΩ to 9.999 kΩ 10 kΩ to 99.99 kΩ 100 kΩ to 999.9 kΩ 1 MΩ to 9.999 MΩ 10 MΩ to 40 MΩ 	<ul style="list-style-type: none"> 0.1 Ω 1 Ω 10 Ω 100 Ω 1 kΩ 10 kΩ 	<ul style="list-style-type: none"> ± (1 % + 3 digits) ± (1 % + 1 digit) ± (1 % + 1 digit) ± (1 % + 1 digit) ± (2 % + 1 digit) ± (5 % + 1 digit)
DC Current; IDC (I =):	<ul style="list-style-type: none"> 0 mA to 150 mA 	<ul style="list-style-type: none"> 0.1 mA 	<ul style="list-style-type: none"> ± (2.5 % + 3 digits)
Unbalance @ 1 MHz; LCL:	<ul style="list-style-type: none"> 0 dB to 55 dB 55.1 dB to 65 dB <p>The length of the test leads can influence the accuracy of the measurement. Dielectric strength for external voltage up to 3 V DC or 3 V AC. At an internal resistance of the source of 1 MΩ it will be measured up to 3.5 V DC / AC.</p>	<ul style="list-style-type: none"> 0.1 dB 0.1 dB 	<ul style="list-style-type: none"> ± 1.5 dB ± 3 dB
NEXT @ 1 MHz; NEXT:	<ul style="list-style-type: none"> 0 dB to 65 dB <p>Dielectric strength for external voltage up to 3 V DC or 3 V AC. At an internal resistance of the source of 1 MΩ it will be measured up to 3.5 V DC / AC.</p>	<ul style="list-style-type: none"> 0.1 dB 	<ul style="list-style-type: none"> ± 1 dB
RFL Resistance troubleshooting	<ul style="list-style-type: none"> Display of: <ul style="list-style-type: none"> - Resistance to error (R_x), distance to error - Resistance from fault to short-circuit (R_y) - Loop resistance (R_s), cable length - Fault resistance (R_{fault}) 	<ul style="list-style-type: none"> Measuring ranges: <ul style="list-style-type: none"> - Loop resistance (R_s): 10..9999 Ω - Fault resistance (R_{fault}): 0..20 MΩ 	<ul style="list-style-type: none"> Accuracy R_x at L_x/L = 0.1 <ul style="list-style-type: none"> - R_s = 2000 Ω: ± 0.3 % ± 0.05 Ω - R_s = 200 Ω: ± 1.0 % ± 0.06 Ω
Remote Kit Control	<ul style="list-style-type: none"> Use ARGUS to control different Remote Kits to switch the Line on the remote side, e.g. TX916 <ul style="list-style-type: none"> - Short-circuit - Exchange connect - Open circuit 	<ul style="list-style-type: none"> <ul style="list-style-type: none"> - Loop - Tone mode - switch 2 ports simultaneously 	
Other Functions:	<ul style="list-style-type: none"> Autotest 	<ul style="list-style-type: none"> Fast cable check 	<ul style="list-style-type: none"> Signature detection (e.g. PPA)
Reference Conditions (calibration):	<ul style="list-style-type: none"> Temperature: 23 °C ± 5 °C Relative humidity: 50 % ± 20 % relative humidity, non-condensing 		<ul style="list-style-type: none"> Frequency of measurement type: 50 Hz ± 5 Hz, sinus

data sheet: technical data subject to change.

Specifications Copper Tests

General:	Applications, Settings + Results:	
TDR Test Time Domain Reflectometer	<ul style="list-style-type: none"> Determination of the Loop Length For Identification and Detection of Shorts, Opens, Impedance Mismatches, Bridged Taps/Stubs, Moisture, Loading Coils, Loose Contacts and more Pre-configured List of Cable Types, Velocity of Propagation (VoP): 30 % (45 m/μs) up to 99.9 % (149.7 m/μs), Line Resistance, Mutual Capacitance Measurement Range: 3.5 up to 6000 m 	<ul style="list-style-type: none"> Res.: 0.025 % of Measurement Range; Accuracy: ±2 % Graphical Display of Reflection Course Configurable gain: -26 dB up to +44 dB Config. Pulse: 5 ns up to 3.2 μs, Pulse Height: 5 V and 20 V Dynamic range: 60 dB / Amplification Level Zoom + Cursor for a Detailed Analysis Save + Set of Reference Curve Start/Stop Function (Realtime Mode)
Line Scope DSL Spectrum Analysis DSL Oscilloscope RF Current Clamp	<ul style="list-style-type: none"> Monitoring in Time/Frequency Domain on all Types of Lines for Telecommunications and on active Lines with up to 200 VDC and 40 Vpp Modem Finder, via Handshake Tones Frequency Range: 20 kHz up to 35 MHz Resolution: 67 Hz up to 8.625 kHz or 0.025 % of Measurement Range, Accuracy: ±2 dB High-impedance or Line Termination: <ul style="list-style-type: none"> - Input Impedance: 3.6 kΩ, <10 pF - Switchable 100 Ω Input Resistance Config. Gain FFT: -26 dB up to +20dB 	<ul style="list-style-type: none"> For Identification and Detection of different Access Types Graphical Display of FFT [dBm/Hz] and of Time (Oscilloscope) Config. X-Axis: FFT or Time [μs] Autom. Trigger in Time Domain Zoom + Cursor for a Detailed Analysis Save + Set of Reference Curve Start/Stop and Peak Hold Function) Peak Hold Function (Min/Max Trailing) Symmetry Toggling Detection of Disturbances/Disturbing Signals

Documentation and Analysis
<ul style="list-style-type: none"> Documentation of all parameters recorded to test reports (in device and on PC) via automatic access tests
<ul style="list-style-type: none"> Transfer of test results via QR code to a smartphone or via WLAN, ETH or DSL to cloud (FTP server)
<ul style="list-style-type: none"> Free of charge firmware updates via cloud or ARGUS update tool (www.argus.info)
<ul style="list-style-type: none"> WLAN for transf. test results to systems of an electronic order processing system, remote control via smartphone

Device Specifications	
Technical Features: <ul style="list-style-type: none"> Hotkey Power management Keypad TFT colour display 6 LEDs Handset ARGUSpedia CE marking User safety RoHS conformance 	Quick start of various tests User configurable 18 keys, 4 cursor keys, 4 context-sensitive softkeys 800 x 480 pixels, backlit, incl. touchscreen Indicating the status + Ethernet port LEDs Integrated earpiece and microphone Integrated help function Complies with CE directives Fulfills EN 60950-1:2006-11 Conformance according to WEEE directive
Interfaces: <ul style="list-style-type: none"> 1x RJ-45, 1x RJ-11 1x Ethernet 1x SFP port USB client interface, 2x USB host interface WLAN 	For xDSL, G.fast, POTS, U, R and C Measurement 10/100/1000 Base-T/ 2.5 GBase-T, RJ-45 test port 100 Base-FX/LX, 1000 Base-SX/LX/ZX/BX, 2.5 GBase-T Type micro B, Type A IEEE802.11a/b/g/n
Environmental conditions: <ul style="list-style-type: none"> Temperature range for charging battery pack Max. Operating temperature (endurance tests) Max. Operating temperature (in battery mode) Operating temperature (with power/car adapter) Storing Temperature Relative humidity 	0 °C (+32 °F) up to +40 °C (+104 °F) 0 °C (+32 °F) up to +40 °C (+104 °F) -10 °C (+14 °F) up to +50 °C (+122 °F) 0 °C (+32 °F) up to +40 °C (+104 °F) -20 °C (-4 °F) up to +60 °C (+140 °F) Up to 95 %, non-condensing
Dimensions: <ul style="list-style-type: none"> Size Weight 	H x W x D: 300 x 128 x 84 mm (11.81 x 5.04 x 3.31 in) <1.500 g (3.31 lbs) ARGUS incl. battery pack

data sheet: technical data subject to change.

Standard Package:

Basic device incl. Gigabit-Ethernet interface (10/100/1000 Base-T), ADSL (Annex A+L+M) + VDSL2 (up to profile 35b), Bridge/router mode, Wi-Fi-Management, IP+Download package (IP ping, traceroute test, HTTP/FTP download, FTP upload/server, Speedtest® by Ookla), Line scope, Network scan, Web browser, Cloud services, Lithium-Ion battery pack, Mains adaptor, Shock absorbing rubber jacket, Carrying case, 2 wire cable + xDSL adaptor, Micro USB cable, Carrying strap, Hand strap and English manual

Additional Options:

• ADSL Annex B + J Enhancement		Order number: 026008
• VDSL2 Bonding Enhancement (up to Profile 35b)	requires Art.No.: 026045, incl. Bonding Cable	Order number: 026050
• G.fast Enhancement (Profile 106a and 212a)		Order number: 026045
• Time Domain Reflektometer option (TDR)	up to 6 km	Order number: 026040
• Copper Package (Cable Multimeter/DMM)	incl. banana cable red/black + green	Order number: 026010
• Resistive Fault Location option (RFL)	requires Art.No.: 026010	Order number: 026055
• ARGUS® RF Current Clamp		Order number: 000265
• 2,5 Gigabit Ethernet Interface	10/100/1000/2.5 GigE via RJ45 and SFP	Order number: 020035
• GPON Option	incl. ARGUS® GPON ONT SFP, incl. SC/LC-APC patch cable	Order number: 026076
• GPON Option, calibrated	incl. Art.No.: 026076 + initial calibration of the level measurement	Order number: 026077
• PON Installation Test	incl. Art.No.: 026077	Order number: 026078
• Optical Light Source (OLS)		Order number: 000280
• Optical Power Meter option (OPM)	incl. ARGUS® Optical Power Meter (SFP), type 6006	Order number: 026080
• xPON OPM + PON ID for GPON/XGS-PON		Order number: 026200
• xPON installation for GPON/XGS-PON		Order number: 026201
• GPON-ONT for xPON-OPM	incl. stick	Order number: 026202
• XGS-PON-ONT for xPON-OPM	incl. stick	Order number: 026203
• Optical Fault Finder option (OFF)	w/o OFF SFP (000275)	Order number: 026083
• Fiber Inspection option	w/o Fiber Inspection Tool	Order number: 026094
• Wi-Fi Test Interface	w/o Wi-Fi USB stick (000250)	Order number: 026059
• ARGUS® WLAN Analyzer	requires WLAN basic	Order number: 026054
• ARGUS® 2G4 Scope (2.4 GHz Spectrum Analysis)	incl. USB 2G4 Scope stick	Order number: 000240
• VoIP Option	incl. MOS value, Call generator, NT Sim., SIP trunk	Order number: 026060
• IPTV Option	incl. IPTV STB mode, IPTV passive, channel scan	Order number: 026065
• Triple Play package	incl. VoIP and IPTV Option	Order number: 026067
• ARGUS® Real Speed	RFC 6349, incl. iPerf v2/ v3	Order number: 026056
• iPerf v2/ v3	Client/ Server	Order number: 026068
• ISDN BRI S/T TE Interface	requires Art.No.: 026045	Order number: 026016
• POTS Option	POTS	Order number: 026070
• SFP Support	supports various SFP types	Order number: 026042

* We would be glad to provide further details and information about additional accessories on request.

data sheet: technical data subject to change.



GESELLSCHAFT FÜR
INFORMATIONSTECHNIK mbH

Rahmedestraße 90
D-58507 Lüdenscheid

Tel: +49 2351 9070-0

Fax: +49 2351 9070-70

E-Mail: sales@argus.info

Internet: www.argus.info