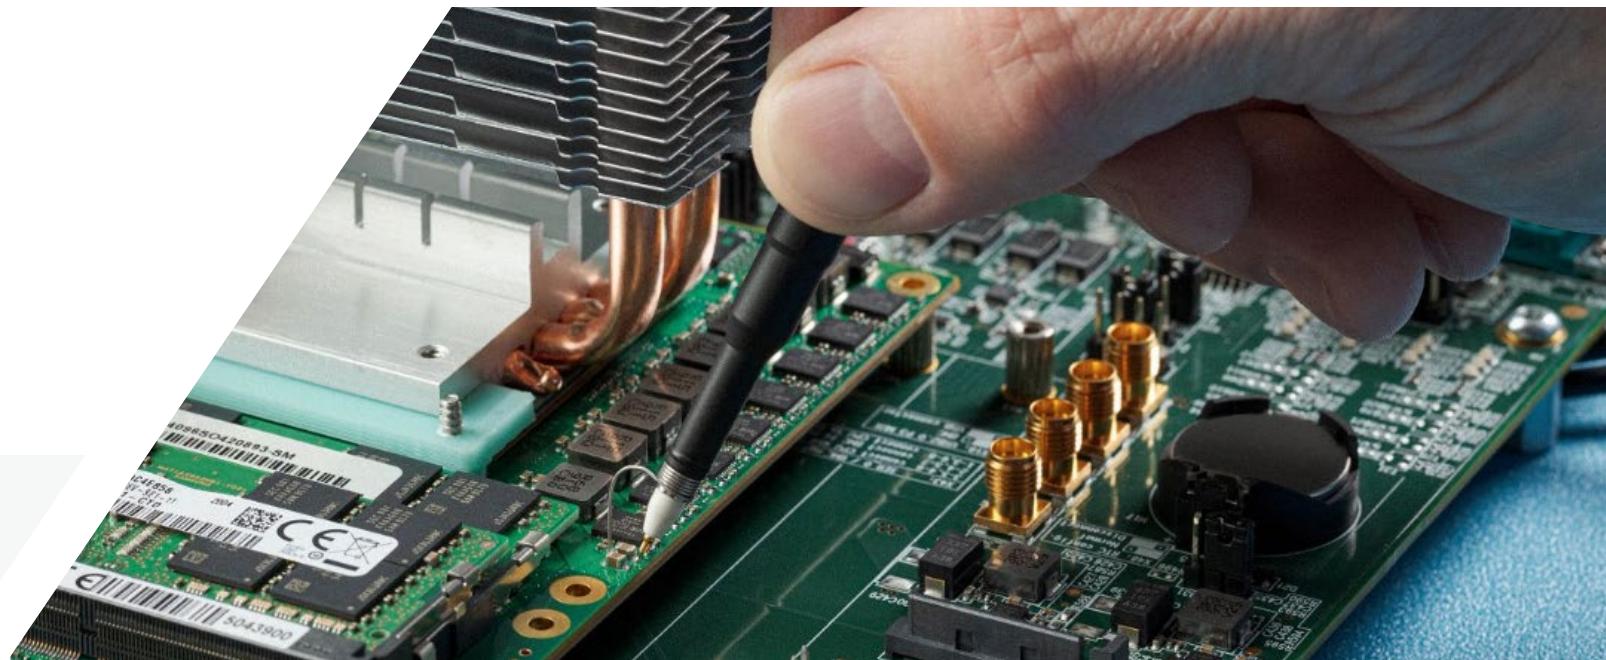




# Probes Selection Guide



# Probe / Oscilloscope Compatibility

		PROBE						
OSCILLOSCOPE		BNC	TekProbe™ LEVEL 1	TekProbe™ LEVEL 2	TekVPI™	TekVPI™ w/HardKey	FlexChannel™	TekConnect™
	<b>Std BNC</b>	2 Series MSO TDS1000/2000 TBS1000 TPS2000 THS3000	●	● Readout not functional	● 1103 Power Supply (50 Ω termination may be required)			
	<b>TekProbe LEVEL 1</b>		●	●	● 1103 Power Supply (50 Ω termination may be required)			
	<b>TekProbe LEVEL 2</b>	TDS3000 TDS5000 TDS7054/7104	●	●	● <sup>1</sup>			
	<b>TekVPI</b>	TBS2000 MSO/DPO2000 MSO/DPO3000 MSO/DPO4000 DP07000C	●	●	● <sup>2</sup> TPA-BNC	● <sup>2,3,5</sup>		
	<b>TekVPI w/ HardKey</b>	3 Series MDO MSO/DPO4000B MD03000/4000C MSO/DPO5000	●	●	● TPA-BNC	● <sup>4,5</sup>	●	
	<b>FlexChannel</b>	4 Series MSO 5 Series MSO 5 Series MSO LP 6 Series MSO	●	●	● TPA-BNC	●	●	●
	<b>TekConnect</b>	MSO/DSA/DPO70000 TDS6000 TDS7154/B, 7254B, 7404B, 7704B, CSA7154, 7404/B	TCA-BNC	TCA-1MEG	TCA-1MEG (ADA400A, P52xx) or TCA-BNC	TCA-VPI50 (50 Ω probe only)		●

1. Some probes require an external power supply (1103) when used with the TDS3000 series

2. When using with MSO / DPO2000 series, a dedicated AC adapter (119-8726-00) and a power cable (161-0342-00) are required.

3. When using with MSO / DPO3000 series, depending on the probe you may need a separate AC adapter (119-8726-00) and a power cable (161-0342-00).

4. When using with MSO / DPO5000 series, separate AC adapter (119-8726-00) and power cable (161-0342-00) may be required depending on the probe model and number.

5. When using with TBS2000 and MDO3000 series, the total power draw capacity can not exceed the maximum power supply capacity of the oscilloscope, see here for more information.

6. Readout does not function in the TBS2000 series.

# Passive Probes

Passive voltage probes ship standard with most oscilloscopes and provide a low cost, general purpose probing solution. Generally, these probes lack the performance of an active voltage probe but provide the ruggedness and wide dynamic range suitable for visualizing signals over a broad range of applications. Tektronix has released a new class of passive probes that redefine performance in the passive probe product category.

Tektronix new class of passive probe solutions offer:

- Best-in-class bandwidth up to 1 GHz
- Best-in-class input capacitance as low as 3.9 pF which minimizes probe loading effects
- Best-in-class input capacitance which minimizes performance loss when long ground leads are attached
- Automated probe compensation eliminating the need for the compensation screwdriver

Model	Bandwidth	Attenuation	Input Impedance	Maximum Voltage	Interface	Compensation Range
<b>TPP1000</b>	1000 MHz	10X	$10 \text{ M}\Omega \parallel 3.9 \text{ pF}$	$300 \text{ V}_{\text{rms}}$ (CAT II)	TekVPI w/Key	
<b>TPP0500B</b>	500 MHz	10X	$10 \text{ M}\Omega \parallel 3.9 \text{ pF}$	$300 \text{ V}_{\text{rms}}$ (CAT II)	TekVPI w/Key	—
<b>TPP0502</b>	500 MHz	2X	$2 \text{ M}\Omega \parallel 12.7 \text{ pF}$	$300 \text{ V}_{\text{rms}}$ (CAT II)	TekVPI w/Key	—
<b>TPP0250</b>	250 MHz	10X	$10 \text{ M}\Omega \parallel 4 \text{ pF}$	$300 \text{ V}_{\text{rms}}$ (CAT II)	TekVPI w/Key	—
<b>TPP0051</b>	50 MHz	10X	$10 \text{ M}\Omega \parallel 12 \text{ pF}$	$300 \text{ V}_{\text{rms}}$ (CAT II)	BNC	15-25 pF
<b>TPP0100</b>	100 MHz	10X	$10 \text{ M}\Omega \parallel 12 \text{ pF}$	$300 \text{ V}_{\text{rms}}$ (CAT II)	BNC	8-18 pF
<b>TPP0101</b>	100 MHz	10X	$10 \text{ M}\Omega \parallel 12 \text{ pF}$	$300 \text{ V}_{\text{rms}}$ (CAT II)	BNC	15-25 pF
<b>TPP0200</b>	200 MHz	10X	$10 \text{ M}\Omega \parallel 12 \text{ pF}$	$300 \text{ V}_{\text{rms}}$ (CAT II)	BNC	8-18 pF
<b>TPP0201</b>	200 MHz	10X	$10 \text{ M}\Omega \parallel 12 \text{ pF}$	$300 \text{ V}_{\text{rms}}$ (CAT II)	BNC	15-25 pF
<b>P2220</b>	6 MHz, 200 MHz	1X, 10X	$1 \text{ M}\Omega \parallel 110 \text{ pF}$ , $10 \text{ M}\Omega \parallel 17 \text{ pF}$	$150 \text{ V}_{\text{rms}}$ (CAT II), $300 \text{ V}_{\text{rms}}$ (CAT II)	BNC	15-25 pF
<b>P2221</b>	6 MHz, 200 MHz	1X, 10X	$1 \text{ M}\Omega \parallel 110 \text{ pF}$ , $10 \text{ M}\Omega \parallel 17 \text{ pF}$	$150 \text{ V}_{\text{rms}}$ (CAT II), $300 \text{ V}_{\text{rms}}$ (CAT II)	BNC	10-25 pF
<b>P5050B</b>	500 MHz	10X	$10 \text{ M}\Omega \parallel 11 \text{ pF}$	$300 \text{ V}_{\text{rms}}$ (CAT II)	TekProbe LEVEL1	15-25 pF
<b>P6139B</b>	500 MHz	10X	$10 \text{ M}\Omega \parallel 8 \text{ pF}$	$300 \text{ V}_{\text{rms}}$ (CAT II)	TekProbe LEVEL1	8-18 pF
<b>P6101B</b>	15 MHz	1X	$1 \text{ M}\Omega \parallel 100 \text{ pF}$	$300 \text{ V}_{\text{rms}}$ (CAT II)	BNC	—
<b>P3010</b>	100 MHz	10X	$10 \text{ M}\Omega \parallel 12 \text{ pF}$	$300 \text{ V}_{\text{rms}}$ (CAT II)	TekProbe LEVEL1	10-15 pF
<b>THP0301</b>	300 MHz	10X	$10 \text{ M}\Omega \parallel 11 \text{ pF}$	$300 \text{ V}_{\text{rms}}$ (CAT II)	BNC	



TPP1000 / TPP0500B





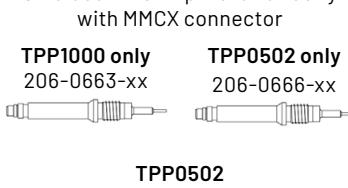



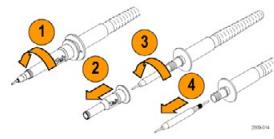



TPP0200 / TPP0100



P6139B

LEARN MORE 

## Passive Probes - Accessories

STANDARD ACCESSORIES				TIP CARTRIDGES	
<b>Hook Tip</b> 013-0362-xx  <small>289-011</small>	<b>Ground Springs</b> 016-2028-xx(long, 2 ea.) 016-2034-xx(short, 2 ea.) 	<b>Ground Lead, with Alligator Clip</b> 196-3521-xx  <small>289-010</small>	<b>Color Bands</b> 016-0633-xx(5 pairs) 	<b>TPP1000</b> 206-0610-xx(rigid tip) 206-0611-xx(pogo tip)  <small>289-009</small>	<b>TPP1000, TPP0502</b> Shielded MMCX tip mates directly with MMCX connector <b>TPP1000 only</b> 206-0663-xx  <small>206-0666-xx</small>
<b>Micro-Hook Tip</b> 013-0362-xx  <small>289-006</small>	<b>Universal IC Cap</b> 013-0366-xx  <small>289-007</small>	<b>Insulator Sleeve</b> 342-1194-xx TPP1000, TPP0500, TPP0502  <small>289-010</small> 204-1226-xx TPP0500B, TPP0250, P6139B, P5050B  <small>346-002</small>	<b>Adjustment Tool</b> 003-1433-xx  <small>2720-015</small>	<b>TPP0500B, TPP0250</b> 206-0649-xx(rigid tip) 206-0650-xx(pogo tip)  <small>346-001</small>	<b>TPP0502</b> 206-0641-xx(rigid tip) 206-0642-xx(pogo tip)  <b>P6139B</b> 206-0635-xx(rigid tip)  <b>P5050B</b> 206-0636-xx(rigid tip)  <small>346-014</small>
OPTIONAL ACCESSORIES					
<b>MMCX to Square Pin Adapters</b> 131-9717-xx(0.1 inch - blue) 131-9677-xx (0.062 inch - white)  <small>Adopts MMCX tips to square pins at 0.1 in. or 0.062 in. centers.</small> 	<b>Electrical Y-Lead</b> 196-3556-xx(probe tip to square pin sockets) 	<b>MicroCKT Test Tip</b> 206-0569-xx 	<b>Ground Lead, 6 inch Clip-On</b> 196-3198-xx 	<b>DUT Interface Pin Kit</b> 0.018 inch round solder-in pins 020-3169-xx(qty 20) 	
<b>Rigid/Pogo Probe Tip Adapters</b> 013-0367-xx(tip to BNC) 016-2016-xx(PCB Test Point) 131-4210-xx (Chassis-Mount TP) 	<b>Solder-Aide for Pin Kit</b> Holds 0.018 inch pins 0.062 inch apart for soldering on 0402 SMT parts 	<b>Ground Lead, 12 inch Alligator</b> 196-3512-xx 	<b>Probe Tip Tripod</b> 352-1170-xx(qty. 2) 		
<b>Electrical Y-Lead</b> 196-3434-xx(square pin on 0.1 in. centers, requires 206-0663-xx and 131-9717-xx) 					

# Active Probes – Low Voltage Single-ended

A low voltage single-ended probe is typically used for measuring high-speed, ground referenced signals up to 12 V. These low voltage probes are the best choice for making measurements on high impedance, high frequency circuit elements which require minimal probe loading. Users should select probes with a low input capacitance specification ( $-1\text{ pF}$ ) to minimize the probe's loading effect on the circuit. A probe with lower input capacitance will offer higher input impedance at higher frequencies.

Tektronix Low Voltage Single-ended Probe solutions offer:

- Bandwidths up to 4 GHz
- Very high input impedance with low input capacitance ( $<1\text{ pF}$ )
- Most extensive set of probe accessories for optimum measurement performance
- The TAP1500L is equipped with a 7 m cable; Ideal for Flying Probe Testers

Model	Bandwidth	Attenuation	Input Impedance	Dynamic Range	Offset Range	Maximum Non-Destruct Voltage	Interface
<b>TAP4000</b>	4 GHz	10X	$40\text{ k}\Omega \parallel 0.8\text{ pF}$	$\pm 4\text{ V}$	$\pm 10\text{ V}$	$\pm 30\text{ V}$	TekVPI
<b>TAP3500</b>	3.5 GHz	10X	$40\text{ k}\Omega \parallel 0.8\text{ pF}$	$\pm 4\text{ V}$	$\pm 10\text{ V}$	$\pm 30\text{ V}$	TekVPI
<b>TAP2500</b>	2.5 GHz	10X	$40\text{ k}\Omega \parallel 0.8\text{ pF}$	$\pm 4\text{ V}$	$\pm 10\text{ V}$	$\pm 30\text{ V}$	TekVPI
<b>TAP1500</b>	1.5 GHz	10X	$1\text{ M}\Omega \parallel 1\text{ pF}$	$\pm 8\text{ V}$	$\pm 10\text{ V}$	$\pm 25\text{ V}(\text{DC + PkAC})$	TekVPI
<b>TAP1500L</b>	1.5 GHz	10X	$1\text{ M}\Omega \parallel 1\text{ pF}$	$\pm 8\text{ V}$	$\pm 10\text{ V}$	$\pm 25\text{ V}(\text{DC + PkAC})$	TekVPI
<b>P6243</b>	1 GHz	10X	$1\text{ M}\Omega \parallel 1\text{ pF}$	$\pm 8\text{ V}$	N/A	$\pm 15\text{ V}(\text{DC + PkAC})$	TekProbe LVL2
<b>P6245</b>	1.5 GHz	10X	$1\text{ M}\Omega \parallel 1\text{ pF}$	$\pm 8\text{ V}$	$\pm 10\text{ V}$	$\pm 15\text{ V}(\text{DC + PkAC})$	TekProbe LVL2

LEARN MORE 



TAPX000



TAP1500L  
(7 m cable)



P6243/P6245

# Power Rail Probes

The TPR1000 and TPR4000 probes provide a low noise, large offset range solution for measurement of ripple on DC power rails ranging from -60 to +60 VDC. Tektronix's power rail probes offer industry leading low noise and high offset range required to measure AC ripple between 200  $\mu$ V p-p and 800 mV p-p at up to 4 GHz.

Model	Bandwidth	Attenuation	Input Impedance	Dynamic Range	Offset Range	Interface
<b>TPR4000</b>	4 GHz	1.25X	50 k $\Omega$ DC – 10 kHz, 50 $\Omega$ AC > 100 kHz	$\pm$ 1 V	$\pm$ 60 V	TekVPI
<b>TPR1000</b>	1 GHz	1.25X	50 k $\Omega$ DC – 10 kHz, 50 $\Omega$ AC > 100 kHz	$\pm$ 1 V	$\pm$ 60 V	TekVPI

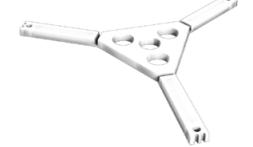
## Key Specs:

- <300  $\mu$ V p-p noise on 6 Series MSO (20 MHz BW Limit)
- <1 mV p-p noise on 6 Series MSO (Full Bandwidth)
- $\pm$ 60 V offset range
- Offset setting error:  $\pm$ 2 mV max,  $\pm$ 0.4  $\mu$ V typical

LEARN MORE 



## Power Rail Probes – Accessory Kits

STANDARD ACCESSORIES (TPR4KIT KIT)			
1.3m SMA to MMCX Cable - 4 GHz	1.3m SMA to SMA Cable - 4 GHz	MMCX to U.FL adapter - 2 GHz	MMCX to square-pin adapter - 1GHz
			
Solder-Aide for Pin Kit	DUT Interface Pin Kit - 1GHz	TPR4SIACOAX: MMCX to micro-coax - 4 GHz (set of 3)	TPR4SIAFLEX: MMCX to performance solder tip - 4 GHz (set of 3)
			
Solderable enameled wire	Probe tip tripod support	Marker bands	
			
TPRBRWSR1G KIT			
Blade ground	SMT Clip	SMA browser - 1GHz	
			
Spring ground	Rigid browser pin - 1GHz	Browser to square-pins - 1GHz	
			
Alligator ground	Pogo browser pin - 1GHz		
			

TPR4KITHT KIT	
	
TPR4SIACOAX: MMCX to micro-coax - 4 GHz (set of 3)	TPR4SIAFLEX: MMCX to performance solder tip - 4 GHz (set of 3)
TPR4SIAFLEX KIT	
TPR4SIAFLEX: MMCX to performance solder tip - 4GHz (set of 3)	
	
TPR4SIACOAX KIT	
TPR4SIACOAX: MMCX to micro-coax - 4 GHz (set of 3)	
	

# Differential Probes - Low Voltage

Differential signaling used in high speed serial standards requires very accurate characterization. The industry-leading bandwidth and signal fidelity found in a Tektronix low voltage differential probe ensures that you see every possible detail.

Model	Bandwidth	Attenuation	Input Impedance	Differential Input Voltage	Operating Window	Offset Range	Interface
<b>TDP4000</b>	$\geq 4$ GHz	5X	$100 \text{ k}\Omega \parallel 0.3 \text{ pF}$	$\pm 2 \text{ V}$	$\pm 15 \text{ V}$ (DC + pk AC)	$\pm 1 \text{ V}$	TekVPI
<b>TDP3500</b>	$\geq 3.5$ GHz	5X	$100 \text{ k}\Omega \parallel 0.3 \text{ pF}$	$\pm 2 \text{ V}$	$\pm 15 \text{ V}$ (DC + pk AC)	$\pm 1 \text{ V}$	TekVPI
<b>TDP1500</b>	$\geq 1.5$ GHz	1X, 10X	$200 \text{ k}\Omega \parallel 1 \text{ pF}$	1X: $\pm 0.85$ 10X: $\pm 8.5 \text{ V}$	$\pm 25 \text{ V}$ (DC + pk AC)	$\pm 7.0 \text{ V}$	TekVPI
<b>TDP1000</b>	1 GHz	5X / 50X	$1 \text{ M}\Omega \parallel 1 \text{ pF}$	50X: $\pm 42 \text{ V}$ 5X: $\pm 4.2 \text{ V}$	$\pm 42 \text{ V}$ (DC + pk AC) 30 Vrms	$\pm 42 \text{ V}$	TekVPI
<b>TDP0500</b>	500 MHz	5X / 50X	$1 \text{ M}\Omega \parallel 1 \text{ pF}$	50X: $\pm 42 \text{ V}$ 5X: $\pm 4.2 \text{ V}$	$\pm 42 \text{ V}$ (DC + pk AC) 30 Vrms	$\pm 42 \text{ V}$	TekVPI
<b>P6248</b>	>1.5 GHz	1X, 10X	$200 \text{ k}\Omega \parallel <1 \text{ pF}$	1X: $\pm 0.85$ 10X: $\pm 8.5 \text{ V}$	$\pm 7.0 \text{ V}$	depends on scope	TekProbeLVL2
<b>P6247</b>	>1 GHz	1X, 10X	$200 \text{ k}\Omega \parallel <1 \text{ pF}$	1X: $\pm 0.85$ 10X: $\pm 8.5 \text{ V}$	$\pm 7.0 \text{ V}$	depends on scope	TekProbeLVL2
<b>ADA400A</b>	>1 MHz	.1X - 100X	$1 \text{ M}\Omega \parallel \sim 55 \text{ pF}$	.1-80 V**	$\pm 10 \text{ to } \pm 40 \text{ V}^{**}$	$\pm 1 \text{ to } \pm 40 \text{ V}^{**}$	TekProbeLVL2

LEARN MORE 



TDP3500/TDP4000




TDP1500



TDP0500



P6247/P6248




ADA400A

## Differential Probes - Low Voltage - TDP0500, TDP1000 & TDP1500 Accessories



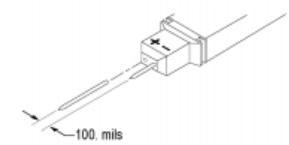
### Straight Pins

Reorder: 016-1891-XX

**Usable bandwidth**  
<1.5 GHz**Typical rise time**  
<350 ps**Connection type**  
PCB, Vias, & ICs

### MicroCKT Test Tip

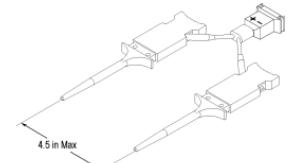
Reorder: 206-0569-XX

**Usable bandwidth**  
<100 MHz**Typical rise time**  
<3.5 ns**Connection type**  
Leaded components

Use the MicroCKT test tips to access dense circuitry and IC leads spaced down to 10 mil-centers.

### Y-Lead Adapter

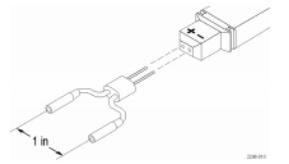
Reorder: 196-3434-XX

**Usable bandwidth**  
<100 MHz**Typical rise time**  
<3.5 ns**Connection type**  
0.025" Square Pin

Use the Y-lead adapter to extend the reach of the probe and to connect to 0.025 inch square pins spaced as far as 1.5 inches apart. Use with Square pin adapter.


### Longhorn Adapter

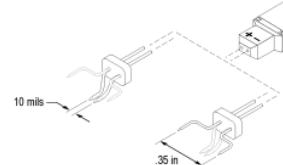Reorder: 016-1884-XX

**Usable bandwidth**  
<1.5 GHz**Typical rise time**  
<233 ps**Tip spacing**  
10 mils to .35 Inches  
**Connection type**  
PCB, Vias, & ICs

### IC Micro-Grabber

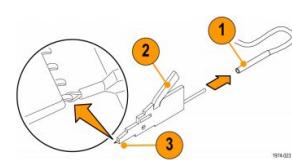
Reorder: SMK4

**Usable bandwidth**  
<100 MHz**Typical rise time**  
<3.5 ns**Connection type**  
Leaded components

Use the IC Micro-Grabber to probe the leads on integrated circuits that are surface-mounted.


### 1" Solder Down Adapter

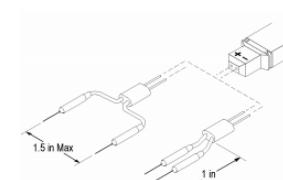Resistor Kit: 020-2506-XX

**Usable bandwidth**  
>1 GHz**Typical rise time**  
<233 ps**Tip spacing**  
10 mils to .35 Inches  
**Connection type**  
0.025" Square Pin


### 3" Solder Down Adapter

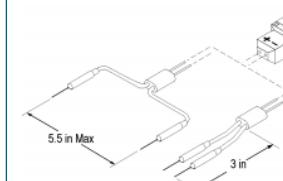Resistor Kit: 196-3505-xx

**Usable bandwidth**  
<600 MHz**Typical rise time**  
<265 ps**Tip spacing**  
10 mils to .35 Inches  
**Connection type**  
Solder in

### 3" Ground Lead

Reorder: 196-3465-XX



### Color Bands

Reorder: 196-3465-XX

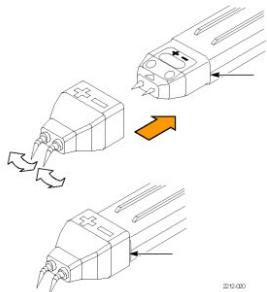


## Differential Probes - Low Voltage - TDP3500 & TDP4000 Accessories



### Variable Spacing Adapter

Reorder: 016-1885-XX



**Usable bandwidth**  
Up to 4 GHz


**Typical rise time**  
<110 ps

**Tip spacing**  
.020 to .180 inches

**Connection type**  
PCB, Vias, & ICs

### TwinFoot™ Adapter

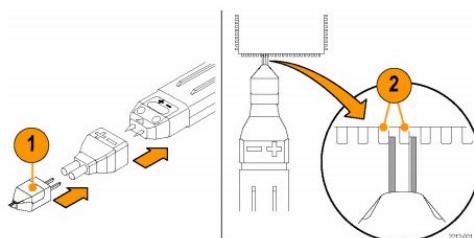Reorder: 016-1785-XX



**Connection type**  
SMT components

Use the TwinFoot adapter to probe two adjacent leads on a surface-mount integrated circuit.  
Use with Solder-in Adapter.


### Square Pin Adapter

Reorder: 016-1884-XX

**Usable bandwidth**  
<3.5 GHz

**Typical rise time**  
<120 ps

**Connection type**  
.025" Square Pin



Use the square pin adapter to connect the probe to other accessories, such as the Y-lead adapter.


### Y-Lead Adapter

Reorder: 196-3434-XX

**Usable bandwidth**  
<100 MHz

**Typical rise time**  
<3.5 ns

**Connection type**  
.025" Square Pin



Use the Y-lead adapter to extend the reach of the probe and to connect to 0.025 inch square pins spaced as far as 1.5 inches apart. Use with Square pin adapter.

### IC Micro-Grabber

Reorder: SMK4

**Usable bandwidth**  
<100 MHz

**Typical rise time**  
<3.5 ns

**Connection type**  
Leaded components

Use the IC Micro-Grabber to probe the leads on integrated circuits that are surface-mounted.

### MicroCKT Test Tip

Reorder: 206-0569-XX

**Usable bandwidth**: <100 MHz  
**Typical rise time**: <3.5 ns  
**Connection type**: Leaded components

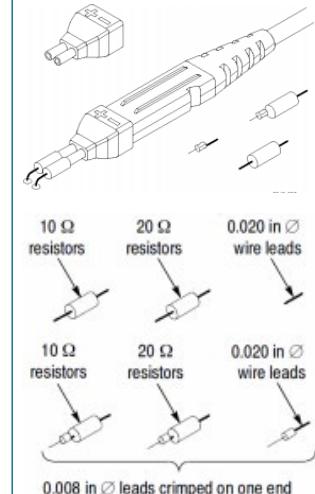
Use the MicroCKT test tips to access dense circuitry and IC leads spaced down to 10 mil-centers.

### Solder in Adapter + Resistor Kit

Solder in Kit: 020-2505-XX

Solder in adapter: 016-1296-XX

Resistor Kit: 020-2506-XX



**Usable bandwidth**: Up to 4.3 GHz


**Typical rise time**: Down to 124 ps

**Connection type**: Solder in

Use the solder-in adapter with the resistors and wires in the kit to create soldered test points to your circuit.

### 3" Ground Lead

Reorder: 196-3465-XX



### Color Bands

Reorder: 196-3465-XX



# TriMode™ Probes - Low Voltage Differential & Single-ended

TriMode™ architecture streamlines measurement acquisition by enabling you to make differential, single-ended, and common mode measurements with a single connection.



P7600



P7700



P7500



TDP7700

Model	Bandwidth	Attenuation	Input Impedance	Differential Input Voltage	Operating Window	Offset Range	Interface
<b>P7633</b>	33 GHz	.25X -20X	50 Ω / 225 Ω	2 V, 10 V	±4, ±5	±4	TekConnect
<b>P7625</b>	25 GHz	.25X -20X	50 Ω / 225 Ω	2 V, 10 V	±4, ±5	±4	TekConnect
<b>P7720</b>	20 GHz			See TekFlex Accessory Performance Table			TekConnect
<b>P7716</b>	16 GHz			See TekFlex Accessory Performance Table			TekConnect
<b>P7713</b>	13 GHz			See TekFlex Accessory Performance Table			TekConnect
<b>P7708</b>	8 GHz			See TekFlex Accessory Performance Table			TekConnect
<b>P7520A</b>	>20 GHz	5X, 12X	100 kΩ	5X: ±0.625 V 12.5X: ±1.6 V	+3.7 to -2.0 V	2.5 to -1.5 V	TekConnect
<b>P7516</b>	16 GHz	5X, 12X	100 kΩ	5X: ±0.625 V 12.5X: ±1.6 V	+4.0 to -2.0 V	2.5 to -1.5 V	TekConnect
<b>P7513A</b>	>13 GHz	5X, 12X	100 kΩ	5X: ±0.625 V 12.5X: ±1.6 V	+4.0 to -2.0 V	2.5 to -1.5 V	TekConnect
<b>P7508</b>	8 GHz	5X, 12X	100 kΩ	5X: ±0.625 V 12.5X: ±1.6 V	+4.0 to -2.0 V	2.5 to -1.5 V	TekConnect
<b>P7506</b>	6 GHz	5X, 12X	100 kΩ	5X: ±0.625 V 12.5X: ±1.6 V	+4.0 to -2.0 V	2.5 to -1.5 V	TekConnect
<b>P7504</b>	4 GHz	5X, 12X	100 kΩ	5X: ±0.625 V 12.5X: ±1.6 V	+4.0 to -2.0 V	2.5 to -1.5 V	TekConnect
<b>TDP7708</b>	8 GHz			See TekFlex Accessory Performance Table			Flex Channel
<b>TDP7706</b>	6 GHz			See TekFlex Accessory Performance Table			Flex Channel
<b>TDP7704</b>	4 GHz			See TekFlex Accessory Performance Table			Flex Channel

## TekFlex Accessory Table

[LEARN MORE](#)

TekFlex Accessory	Attenuation	Input Impedance	Differential Input Voltage	Operating Window	Offset Range
<b>P77STFLXA</b> <b>P77STFLXB</b> <b>P77STCABL</b>	4X	100 kΩ    0.4 pF	5 V	±5.25 V	±4 V
<b>P77BRWSR</b>	10X	150 kΩ    22 pF	12 V	±10 V	±10 V
<b>P77C292MM</b>	Variable	50 Ω (SMA)	2 V	±4 V	±4 V

## TriMode Probes – Low Voltage Differential & Single-ended – P7500 Accessories



### DC Calibration Fixture

Use this fixture to calibrate your probes' DC accuracy when making critical measurements.

### G3PO/SMPM Bullet Removal Tool



### G3PO/SMPM Bullet Replacement Kit



### RF Connector Maintenance

High performance RF connectors can often be fragile. Use these accessories to perform regular maintenance checks on your high performance probe to make sure you are getting the best signal integrity.

### High Temp & High Density



#### Damped Wire Tip

Order #: 020-2959-XX, Kit of 25 Low cost solder tip. Not TriMode capable. Used with the 020-2954-00 Socket Cable. Up to 8 GHz bandwidth.



#### TriMode™ High Temperature Tip

Order #: 020-2958-XX, Kit of 10 High temperature tip with a -55°C to 150°C range. Used with the 020-2960-XX Socket Cable XL. Up to 6 GHz bandwidth.



#### TriMode™ Micro-Coax Tip

Order #: 020-2955-XX, Kit of 10 Quick connect solder tip. Used with the 020-2954-XX Socket Cable. Up to 4 GHz bandwidth.

### Mid-bus Probing



#### TriMode™ Resistor Solder Tip

Order #: 020-2936-XX, Kit of 1 High performance solder tip. Easy to solder tip resistors. Up to 18 GHz bandwidth.



#### TriMode™ Extended Resistor Solder Tip

Order #: 020-2944-XX, Kit of 1 Medium performance solder tip. Easy to solder extra long tip resistors. Up to 7 GHz bandwidth.



#### TriMode™ Long Reach Solder Tip

Order #: P75TLRST, Kit of 1 High performance solder tip. Up to 20 GHz bandwidth.



#### TriMode™ Performance Solder Tip

Order #: P75PST, Kit of 1 High performance solder tip. Up to 25 GHz bandwidth.

### Memory Testing



#### TriMode™ Long Reach Solder Tip (75 Ω tip resistor)

Order #: 020-3131-XX, Kit of 1 High performance solder tip for use with memory chip interposers with embedded 100 Ω resistors. Up to 20 GHz bandwidth



#### TriMode™ Long Reach Solder Tip (0 Ω tip resistor)

Order #: 020-3135-XX, Kit of 1 High performance solder tip for use with memory chip interposers with embedded 175 Ω resistors. Up to 20 GHz bandwidth.

### Precision Browsing



#### Precision Differential Probing Module

Order #: P75PDPM High performance handheld probing module. Up to 18 GHz bandwidth.

## TriMode Probes – Low Voltage Differential & Single-ended – P7600 Accessories



### DC Calibration Fixture

Use this fixture to calibrate your probes' DC accuracy when making critical measurements.

### G3PO/SMPM Bullet Removal Tool



### G3PO/SMPM Bullet Replacement Kit



### RF Connector Maintenance

High performance RF connectors can often be fragile. Use these accessories to perform regular maintenance checks on your high performance probe to make sure you are getting the best signal integrity.

#### P76CA-292C



33 GHz Bandwidth Coaxial Adapter with 2.92 mm (Male) connectors and 6" of high performance cable. This adapter is calibrated at the input connectors and is ideal for directly connecting to devices with 2.92 mm or SMA output connectors.

#### P76CA-SMP



33 GHz Bandwidth Coaxial Adapter with SMP (Female) connectors and 6" of high performance cable. This adapter is calibrated at the input connectors and is ideal for directly connecting to devices with SMP output connectors.

#### P76TA



30 GHz Bandwidth P7500 Tip Adapter. The probe and oscilloscope system will support up to 30 GHz of bandwidth when this adapter is used with the P75PST Performance Solder Tip.

#### P76CA-292



33 GHz Bandwidth Coaxial Adapter with 2.92 mm (Female) connectors. This adapter is calibrated at the input connectors and is ideal for use with off the shelf or custom cables. Low skew cable pairs should be used to preserve full bandwidth performance.

#### P75PST



High performance solder tip

### Unique probe filters

The P7600 Series probes contain probe specific S-parameter data. Attaching a P7600 probe to a MSO/DPO70000DX or DP070000SX oscilloscope transfers this data to the instrument to create unique system DSP filters based on the specific S-parameter data of the oscilloscope and the probe. Creating unique filters based on the specific response of the system is critical as bandwidths increase. At bandwidths of 33 GHz, small variations in the signal path can lead to significant variation in frequency response. These variations are corrected using DSP filtering.

## TriMode Probes – Low Voltage Differential & Single-ended – P7700 & TDP7700 TekFlex™ Accessories



### DC Calibration Fixture

Order #: 067-4889-xx

Use this fixture to calibrate your probes DC accuracy when making critical measurements. For P7700 probes.



### Probe Deskew Fixture

Order #: P77DESKEW

Use this fixture to time align your TekFlex probes for the best timing accuracy to make critical timing measurements.

### P77BRWSR



16 GHz handheld browser accessory enables hand or fixtured probing with adjustable tip spacing. The browser's tips are adjustable in spacing using a convenient thumb wheel. A headlight on the tip enhances visibility of the probe point and can be switched on and off as needed.

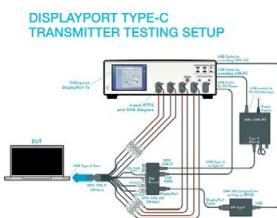
The browser tips are constructed of high strength BeCu and super-ceramic resistors. Each pin has integrated pogo springs and a crown cut tip to help make solid mechanical connections to components and traces.

Probe Stand and wand accessories for both hands free and hands on browsing give you flexibility when you are debugging your circuit.

### P77C292MM



SMA/2.92mm adapter for connecting to coaxial connectors RF/coaxial connectors, such as SMA, are often found on test fixtures or on prototype board designs. Attaching a P7700 or TDP7700 series probe to these on-board connectors is easy with the SMA adapter.



The P77C292MM adapter includes TriMode functionality enabling differential, single ended, and common mode measurements. Include variable termination voltage that can be set manually or automatically using voltage sense circuitry in the P7700 or TDP7700 probes over a range of  $\pm 4$  V for testing display technologies like HDMI and Display Port.

### P77STCABL

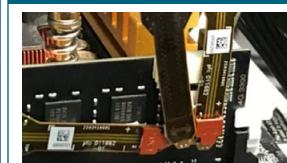


20 GHz solder down accessory with a long reach, flexible cable combined with an active buffer amplifier on the tip. The long tip reach make it great for escaping tight board geometries while maintaining electrical performance.



### P77STFLXA

20 GHz solder down, flex-circuit accessory with an active buffer amplifier on its tip. Each tip has a stored factory AC calibration which is de-embedded automatically on the instrument



### P77STFLXB

16 GHz solder down, flex-circuit accessory provides a probing solution for DDR4 and LPDDR4 electrical validation when used with Nexus XH Series Interposers. Each tip has a stored factory AC calibration and a nominal XH series interposer response which is de-embedded automatically on the instrument



### P77STFLRB / P77HTFLRB

16 GHz solder down, Long-Reach, flex-circuit accessory provides a probing solution for DDR and LPDDR electrical validation when used with Nexus XH Series Interposers. The FLR tips' increased flexibility and long reach helps access inaccessible test points. Each tip has a stored factory AC calibration and a nominal XH series interposer response which is de-embedded automatically on the instrument.



### P77STFLRA / P77HTFLRA

20 GHz solder down, Long Reach, flex-circuit accessory with an active buffer amplifier on its tip. The FLR tips' increased flexibility and long reach helps access inaccessible test points. Each tip has a stored factory AC calibration which is de-embedded automatically on the instrument.

### TekFlex connector technology

The P7700 & TDP7700 Series TriMode probes use the TekFlex connector technology that combines a high-speed signal path with power and communication support for an active buffer tip in a single, easy to attach accessory connector. The TekFlex connector has a pinch-to-open design that when open requires minimal force to attach an accessory tip. When the TekFlex connector is closed, it provides a secure connection to the accessory to avoid accidental disconnections.

# Current Probes

Tektronix current probe solutions offer:

- The broadest range of AC/DC and AC-only current probes
- Measurement accuracy from  $\mu$ As to 2000 A
- Best-in-class bandwidth up to 120 MHz
- Best-in-class current clamp sensitivity down to 1 mA
- The only products with 3rd Party Safety Certification (UL, CSA, ETL)
- The only products with bare wire voltage ratings
- Automatic readout and scaling when used with Tektronix oscilloscopes so you don't have to convert volts to amps or manually set the scaling

## DC/AC

Model	Maximum Current	Minimum Current*	Bandwidth	Rise Time	Interface
<b>TCPA300</b>	Current Probe Amplifier				TekProbe LVL 2
TCP312A	30 A DC; 21.2 A <sub>RMS</sub> ; 50 A peak	1 mA	DC - 100 MHz	$\leq 3.5$ ns	Amplifier
TCP305A	50 A DC; 35.4 A <sub>RMS</sub> ; 50A peak	5 mA	DC - 50 MHz	$\leq 7$ ns	Amplifier
TCP303	150 A DC; 150 A <sub>RMS</sub> ; 500A peak	5 mA	DC - 15 MHz	$\leq 23$ ns	Amplifier
<b>TCPA400</b>	Current Probe Amplifier				TekProbe LVL 2
TCP404XL	500 A DC; 500 A <sub>RMS</sub> ; 750 A peak	1 A	DC - 2 MHz	$\leq 175$ ns	Amplifier
<b>TCP0030A</b>	30 A DC; 30 A <sub>RMS</sub> ; 50 A peak	1 mA	DC - 120 MHz	$\leq 2.92$ ns	TekVPI
<b>TCP0020</b>	20 A DC; 20 A <sub>RMS</sub> ; 100 A peak	10 mA	DC - 50 MHz	$\leq 7$ ns	TekVPI
<b>TCP2020</b>	20 A DC; 20 A <sub>RMS</sub> ; 100 A peak	10 mA	DC - 50 MHz	$\leq 7$ ns	BNC
<b>TCP0150</b>	150 A DC; 150 A <sub>RMS</sub> ; 500 A peak	5 mA	DC - 20 MHz	$\leq 17.5$ ns	TekVPI
<b>A622</b>	100 A DC; 70.7 A <sub>RMS</sub> ; 100 A peak	DC-100 kHz		$\leq 3.5$ $\mu$ s	BNC

\*Winding the conductor multiple times through the current probe jaws increases the sensitivity.

LEARN MORE 



TCP0030A



TCPA300



TCP312A



TCP303



A622

# Current Probes CONTINUED

## AC Only



P6021A

Model	Maximum Current	Minimum Current	Sensitivity*	Bandwidth	Interface
<b>P6021A</b>	10.6 A <sub>RMS</sub> ; 250 A peak		2 mA/mV, 10 mA/mV	120 Hz - 60 MHz	TekProbe
<b>P6022</b>	4 A <sub>RMS</sub> ; 100 A peak		1 mA/mV, 10 mA/mV	935 Hz - 120 MHz	BNC
<b>TRCP3000</b>	3000 A peak	500 mA	2 mV/A	1 Hz - 16 MHz	BNC
<b>TRCP0600</b>	600 A peak	500 mA	10 mV/A	12 Hz - 30 MHz	BNC
<b>TRCP0300</b>	300 A peak	250 mA	20 mV/A	9 Hz - 30 MHz	BNC
<b>CT1</b>	450 mA <sub>RMS</sub> ; 12 A peak		5 mV/mA	25 kHz - 1 GHz	BNC
<b>CT2</b>	2.5 A <sub>RMS</sub> ; 36 A peak		1 mV/mA	1.2 kHz - 200 MHz	BNC
<b>CT6</b>	120 mA <sub>RMS</sub> ; 6 A peak		5 mV/mA	250 kHz - 2 GHz	BNC
<b>A621</b>	1000 A <sub>RMS</sub> ; 2000 A peak	100 mA	1 mV/A	5 kHz - 50 kHz	BNC

\*Winding the conductor multiple times through the current probe jaws increases the sensitivity.

[LEARN MORE](#)



TRCP3000



CT1



CT6



A621

# High Voltage Probes - Single-ended

A high voltage single-ended probe is typically used for measuring ground referenced signals up to 40 kV. However, some single-ended probes are designed for instruments with isolated or floating inputs for measurements that are not ground referenced. Users should select probes with a low input capacitance specification (< 4 pF) to minimize the probe's loading effect on the circuit because a probe with lower input capacitance will offer higher input impedance at higher frequencies.

Tektronix High Voltage Probe solutions offer:

- Best-in-class bandwidth up to 800 MHz
- Best-in-class probe loading with input capacitance as low as 1.8 pF
- The only products with 3rd Party Safety Certification (UL, CSA, ETL)
- Most extensive set of probe accessories

Model	Bandwidth	Max Voltage	Attenuation	Input Impedance	Compensation Range	Interface
<b>P5100A</b>	500 MHz	1000 V <sub>RMS</sub> (CAT II) 2.5kV peak	100X	40 MΩ   2.5 pF	7 pF –30 pF	TekProbe LEVEL 1
<b>P6015A</b>	75 MHz	20 kV <sub>RMS</sub> 40 kV peak	1000X	100 MΩ  ≤ 3 pF	7 pF –49 pF	TekProbe L1 or BNC
<b>P5122</b>	200 MHz	1000 V <sub>RMS</sub> (CAT II)	100X	100 MΩ   4.6 pF	10 pF –25 pF	BNC
<b>TPP0850</b>	800 MHz	1000 V <sub>RMS</sub> (CAT II) 2.5kV peak	50X	40 MΩ   1.8 pF	Auto compensated by scope	TekVPI

LEARN MORE 



P6015A



P5100A



TPP0850

# Differential Probes – High Voltage

A high voltage differential probe is used for measuring the voltage difference between two test points where neither test point is at ground. High voltage differential probes from Tektronix can be used for signals up to 6000 V. These probes are the best choice for making non-ground referenced, floating or isolated measurements in large part due to their common mode rejection capability. These products are designed, manufactured, and serviced by Tektronix.

Tektronix High Voltage Differential Probe solutions offer:

- Best-in-class bandwidth and probe loading
- The only products with 3rd Party Safety Certification (UL, CSA, ETL)
- High and medium voltage products to support varying dynamic range and measurement resolution requirements
- Most extensive set of probe accessories



THDP0100



P5200A



THDP0200/TMDP0200

Model	Bandwidth	Rise Time	Attenuation	Maximum Differential Voltage	Maximum Voltage to Earth Ground	Differential Input Capacitance	Single Ended Input Capacitance	Differential Input Resistance	Single Ended Input Resistance	Cable Length ( $T_{\text{propagation}}$ )	Interface
<b>P5200A</b>	50 MHz	7.8 ns	50:1 / 500:1	±1300 V	1000 Vrms (CAT II)	2 pF	4 pF	10 MΩ	5 MΩ	1.5 m (21 ns)	BNC (1 MΩ)
<b>P5202A</b>	100 MHz	3.8 ns	20:1 / 200:1	±640 V	300 Vrms (CAT II)	2 pF	4 pF	5 MΩ	2.5 MΩ	1.5 m (21 ns)	TekProbe LVL 2 (1 MΩ)
<b>P5205A</b>	100 MHz	3.8 ns	50:1 / 500:1	±1300 V	1000 Vrms (CAT II)	2 pF	4 pF	10 MΩ	5 MΩ	1.5 m (21 ns)	TekProbe LVL 2 (1 MΩ)
<b>P5210A</b>	50 MHz	7.8 ns	100:1 / 1000:1	±5600 V	2300 Vrms (CAT I)	2.5 pF	5 pF	40 MΩ	20 MΩ	1.5 m (21 ns)	TekProbe LVL 2 (1 MΩ)
<b>TMDP0200</b>	200 MHz	1.8 ns	25:1 / 250:1	±750 V	550 Vrms (CAT I)	2 pF	4 pF	5 MΩ	2.5 MΩ	1.5 m (21 ns)	VPI(1 MΩ)
<b>THDP0200</b>	200 MHz	1.8 ns	50:1 / 500:1	±1500 V	1000 Vrms (CAT II)	2 pF	4 pF	10 MΩ	5 MΩ	1.5 m (21 ns)	VPI(1 MΩ)
<b>THDP0100</b>	100 MHz	3.5 ns	100:1 / 1000:1	±6000 V	2300 Vrms (CAT I)	2.5 pF	5 pF	40 MΩ	20 MΩ	1.5 m (21 ns)	VPI(1 MΩ)

LEARN  
MORE

## Differential Probes – High Voltage Accessories

Accessory	Description	P5205A	P5200A/P5205A	THDP0100/P5210A	TMDP0200	THDP0200
AC280-FL	Hook Clip X2	450 Vrms CAT I 300 Vrms CAT II	1000 Vrms CAT II 600 Vrms CAT III	1000 Vrms CAT I 1000 Vrms CAT III	550 Vrms CAT I 300 Vrms CAT III	1000 Vrms CAT II 600 Vrms CAT III
		STANDARD	STANDARD	OPTIONAL	STANDARD	STANDARD
AC283-FL	Micro Grabber Tip X2	450 Vrms CAT I 300 Vrms CAT II	1000 Vrms CAT II 600 Vrms CAT III	1000 Vrms CAT I 1000 Vrms CAT III	550 Vrms CAT I 300 Vrms CAT III	1000 Vrms CAT II 600 Vrms CAT III
		STANDARD	STANDARD	OPTIONAL	STANDARD	STANDARD
AC285-FL	Alligator Clip (large) X2	450 Vrms CAT I 300 Vrms CAT II	1000 Vrms CAT II 600 Vrms CAT III	1000 Vrms CAT I 1000 Vrms CAT III	550 Vrms CAT I 300 Vrms CAT II	1000 Vrms CAT II 600 Vrms CAT III
		STANDARD	STANDARD	OPTIONAL	STANDARD	STANDARD
020-3107-00	Pogo Pin Adapter Kit X2	150 Vrms CAT II	150 Vrms CAT II	150 Vrms CAT II	150 Vrms CAT II	150 Vrms CAT II
		OPTIONAL	OPTIONAL	OPTIONAL	STANDARD	STANDARD
012-1724-00	Test Probe Extension(fine point) Adapter X2	300 Vrms CAT I 300 Vrms CAT II	300 Vrms CAT II	300 Vrms CAT I 300 Vrms CAT II	300 Vrms CAT I 300 Vrms CAT II	300 Vrms CAT II
		OPTIONAL	OPTIONAL	OPTIONAL	STANDARD	STANDARD
344-0670-00	Alligator Clip (small) X2	450 Vrms CAT I 300 Vrms CAT II	1000 Vrms CAT II 600 Vrms CAT III	THDP010: 300 Vrms CAT I P5210A: 1000 Vrms CAT I 1000 Vrms CAT III	300 Vrms CAT I	300 Vrms CAT I
		OPTIONAL	OPTIONAL	OPTIONAL	STANDARD	STANDARD

# IsoVu™ Isolated Voltage Probe

IsoVu™ probes are the right tool for today's demanding power measurement challenges given their industry leading 1 GHz bandwidth, 160 dB or 100 Million to 1 common mode rejection, 60 kV common mode voltage, large  $\pm 3300$  V differential range and superior probe loading.

## Optimize for Performance and Efficiency

The benefits of a power design can only be realized when the switching circuit, the gate drive circuit, and the layout are all properly designed and optimized. IsoVu can be used to:

- Characterize the gate drivers, V<sub>gs</sub>, V<sub>ds</sub>, and I<sub>s</sub>
- Characterize the time alignment of high and low side events
- Optimize and tune the switching characteristics

Model	Bandwidth	Rise Time	Cable Length	Maximum Differential Input Voltage	Maximum Offset range	Maximum Common Mode Voltage to Earth	Interface
<b>TIVP02</b>	200 MHz	2 ns	2 m	3300 V**	$\pm 2500$ V**	60 kV	VPI(4/5/6 Series)
<b>TIVP02L</b>	200 MHz	2 ns	10 m	3300 V**	$\pm 2500$ V**	60 kV	VPI(4/5/6 Series)
<b>TIVP05</b>	500 MHz	850 ps	2 m	3300 V**	$\pm 2500$ V**	60 kV	VPI(4/5/6 Series)
<b>TIVP05L</b>	500 MHz	850 ps	10 m	3300 V**	$\pm 2500$ V**	60 kV	VPI(4/5/6 Series)
<b>TIVP1</b>	1GHz	450 ps	2 m	3300 V**	$\pm 2500$ V**	60 kV	VPI(4/5/6 Series)
<b>TIVP1L</b>	1GHz	450 ps	10 m	3300 V**	$\pm 2500$ V**	60 kV	VPI(4/5/6 Series)



LEARN MORE 

## IsoVu™ Isolated Voltage Probe Accessories

TIVM Tip Model	Attenuation	Differential Voltage	Offset Range	Input Impedance	Max Non-Destruct Voltage Vpk (DC + peak AC) <sup>1</sup>	CMRR						Standard Attachment
						DC - 1MHz	1 MHz	100 MHz	200 MHz	500 MHz	1GHz	
<b>SMA Input (50 Ω Mode)</b>	1:1	±5 V	±25 V	50 Ω    N.A.	5 V RMS	160 dB	145 dB	100 dB	100 dB	100 dB	90 dB	
<b>SMA Input (1 MΩ Mode)</b>	1:1	±5 V	±25 V	1 MΩ    11 pF	100 Vpk	160 dB	145 dB	100 dB	100 dB	100 dB	90 dB	
<b>TIVPMX10X</b>	10:1	±50 V	±200 V	10 MΩ    2.8 pF	250 Vpk	160 dB	115 dB	92 dB	90 dB	85 dB	80 dB	Sensor Tip
<b>TIVPMX50X</b>	50:1	±250 V	±250 V	10 MΩ    < 5 pF	300 Vpk	160 dB	104 dB	85 dB	80 dB	73 dB	70 dB	Sensor Tip
<b>TIVPSQ100X</b>	100:1	±500 V	±500 V	10 MΩ    < 5 pF	600 Vpk	160 dB	100 dB	70 dB	57 dB	39 dB	30 dB	0.1" Square Pin
<b>TIVPWS500X</b>	500:1	±2.5 kV	±2.5 kV	40 MΩ    < 4 pF	3300 Vpk	160 dB	100 dB	60 dB	48 dB	33 dB	25 dB	0.1" Wide Square Pin
<b>TIVPMX1X</b>	1:1	±5 V	±25 V	50 Ω or 1 MΩ    11 pF	5 V RMS (50 Ω) 100 Vpk (1 MΩ)	160 dB	145 dB	100 dB	100 dB	100 dB	90 dB	Sensor Tip



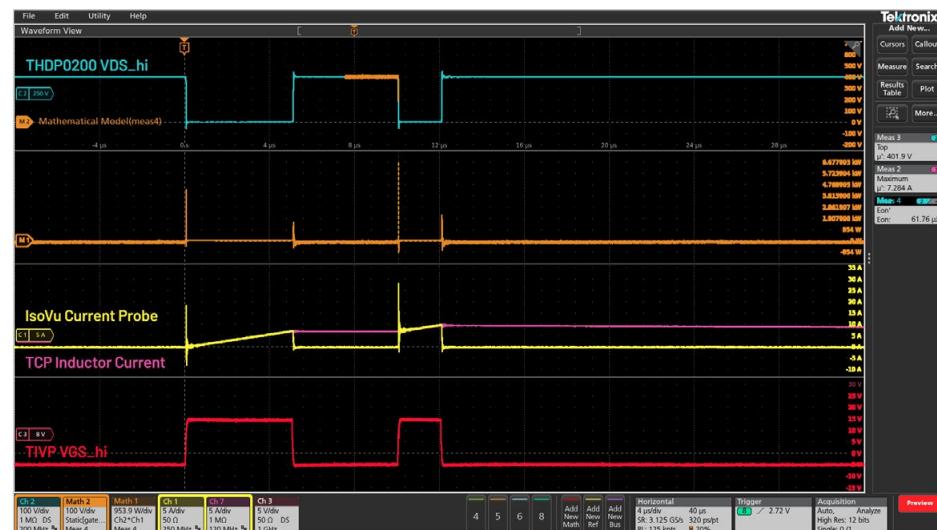
# IsoVu™ Isolated Current Probes

Make more accurate dynamic shunt-based current measurements with TICP Series Current Probes. High bandwidth, flexible ranges, complete galvanic isolation and extremely low noise enable you to go beyond traditional limits – ideal for low noise measurements on current shunts in floating sections of power circuits.


- Measurements from DC to hundreds of MHz when paired with high-performance shunts or CVRs.
- Complete RF isolation between the probe tip and the scope eliminates ground loops and dramatically reduces common mode noise.
- Low attenuation, 50 ohm input impedance, and shielded tips ensure a low noise contribution.

Model	Bandwidth	Differential Voltage	Common Mode Voltage	Common Mode Rejection Ratio
TICP025	250 MHz	±0.5V (1X Tip) ±5V (10X Tip) ±50V (100X Tip)	1800 V Pollution Degree 1 1000 V CAT II	140 dB at DC up to 90 dB at 1 MHz
TICP050	500 MHz	±0.5V (1X Tip) ±5V (10X Tip) ±50V (100X Tip)	1800 V Pollution Degree 1 1000 V CAT II	140 dB at DC up to 90 dB at 1 MHz
TICP100	1 GHz	±0.5V (1X Tip) ±5V (10X Tip) ±50V (100X Tip)	1800 V Pollution Degree 1 1000 V CAT II	140 dB at DC up to 90 dB at 1 MHz

LEARN MORE 



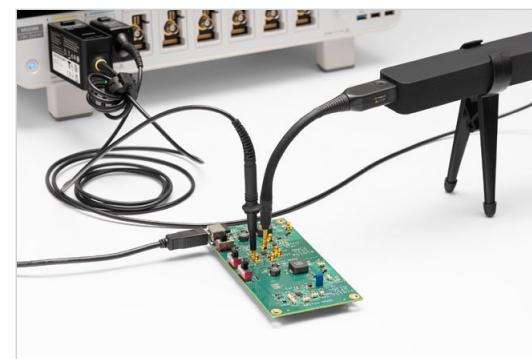IsoVu Current probe clearly shows the ringing.



TICP100

## IsoVu™ Isolated Current Probes Accessories



TICPMM100

Accessory	Description
TICPMM100	100X sensor tip cable with MMCX connector
196-3546-xx	Lead, MMCX to IC grabber
131-9677-xx	Square pin to MMCX adapter, 0.062" spacing
196-3547-xx	Square pin to IC grabber lead
206-0569-xx	MicroCkt grabbers



196-3546-xx



196-3547-xx



131-9677-xx



206-0589-xx

# Optical Probes

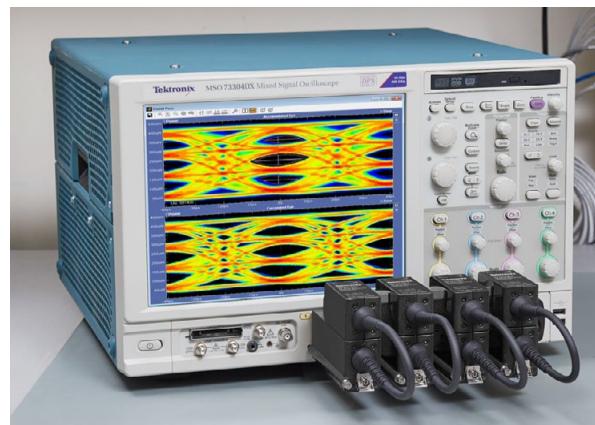
## High Bandwidth

Model	Electrical	Bandwidth (-3 dB)	Wavelength Range Opt. FC/PC	Input Fiber	Oscilloscope Interface	Rise Time (10% to 90%)	Optical Noise	Maximum Input Power (Linear Response)
<b>DP070E1</b>	33 GHz	750 nm to 1650 nm Calibrated at 850 nm, 1310 nm, 1550 nm	FC/PC: 50 $\mu$ m SMF and MMF compatible	FC/APC: 9 $\mu$ m SMF compatible	ATI (1.85 mm RF connector) and TekConnect	10.2 ps, typical	6.6 $\mu$ W rms (TekConnect / ATI)	4 mW, typical
<b>DP070E2</b>	59 GHz	1200 nm to 1650 nm Calibrated at 1310 nm, 1550 nm	FC/PC: 9 $\mu$ m SMF compatible	FC/APC: 9 $\mu$ m SMF compatible	ATI (1.85 mm RF connector) and TekConnect	7.5 ps, typical	10 $\mu$ W rm(ATI)	2 mW, typical

The DP070E Series Optical Probes paired with a DP070000 real time oscilloscope delivers high performance and advanced debug capabilities that are necessary for designers to fully troubleshoot 400G PAM4 signals (up to 56 GBd) and reduce time to market needs. These probes can also be used as a conventional O/E with a flat frequency response for general signal acquisition up to their respective bandwidth: 33 GHz using the DP070E1 or 59 GHz using the DP070E2.

- Versatile and modular design for use with multiple high-performance real time oscilloscope models
- Broad wavelength range with FC/PC and FC/APC connector options
- Deep optical PAM4 and PAM2 (NRZ) signal analysis and error detection
- User selectable Optical Reference Receivers (ORR)

LEARN MORE 



DP070E Series Optical probes using the TekConnect channel on a MSO73304DX Oscilloscope



DP070E Series Optical probes using the TekConnect channel on a MSO73304DX Oscilloscope



Find more valuable resources at [TEK.COM](http://TEK.COM)

Copyright © Tektronix. All rights reserved. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specification and price change privileges reserved. TEKTRONIX and TEK are registered trademarks of Tektronix, Inc. All other trade names referenced are the service marks, trademarks or registered trademarks of their respective companies.

2/25 SBG 61W-14232-14

